

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/052193 A1

(51) International Patent Classification⁷: A61B 5/00,
G09G 5/00, G06F 15/16

(21) International Application Number:
PCT/US2003/038899

(22) International Filing Date: 8 December 2003 (08.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/431,662 8 December 2002 (08.12.2002) US

(71) Applicant (*for all designated States except US*): IMMERSION CORPORATION [US/US]; 801 Fox Lane, San Jose, CA 95131 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): GRANT, Danny [CA/CA]; 6678 Chateaubriand, Montreal, Québec H2S 2N7 (CA). EID, Jeffrey [US/US]; 105 Shadwell Drive, Danville, CA 94506 (US). ENDO, Shoichi [JP/US]; 20268 Northwest Square, Cupertino, CA 95014 (US).

(74) Agents: ALEMANNI, John, C. et al.; Kilpatrick Stockton LLP, 1001 West Fourth St., Winston-Salem, NC 27101 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS AND SYSTEMS FOR PROVIDING HAPTIC MESSAGING TO HANDHELD COMMUNICATION DEVICES

(57) Abstract: Embodiments of the invention relate to methods and systems for providing customized "haptic messaging" to users of handheld communication devices in a variety of applications. In one embodiment, a method of providing haptic messaging to a hand communication device includes: receiving an input signal associated with an event (210); determining a source of the event and selecting the control signal based on the determination (220); and outputting a control signal to an actuator coupled to the hand communication device (230). The control signal is configured to cause the actuator to output a haptic effect associated with the reminder event. An event in the above may be a reminder event or a status event (240).



WO 2004/052193 A1

METHODS AND SYSTEMS FOR PROVIDING HAPTIC MESSAGING TO HANDHELD COMMUNICATION DEVICES

INVENTORS

Danny Grant, Jeffrey Eid, and Shoichi Endo

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Patent Application No.
60/431,662, filed on December 8, 2002, the entire disclosure of which is incorporated herein
by reference.

FIELD OF THE INVENTION

This invention relates generally to haptic-feedback systems. More specifically,
embodiments of the present invention relate to using customized haptic effects in a variety of
applications to convey information to users of handheld communication devices.

BACKGROUND

As handheld communication devices become part of everyday life, device
manufacturers and service providers strive to enhance the versatility and performance of such
devices.

Handheld communication devices in the art (e.g., mobile phones, pagers, personal
digital assistants (PDAs), etc.) typically use auditory and visual cues to alert a user when
incoming messages, such as voice calls and emails, are received. Such auditory and visual
alerts, however, have the disadvantages of being distracting in some situations (e.g., during
driving), or annoying in others (e.g., during a meeting or a concert). Although vibratory
alerts are made available in some communication devices such as cellular phones, such
vibratory effects cannot be customized or personalized according to applications, thus
conveying little information to the user. A need, therefore, exists in the art for a new sensory
modality that delivers information to users of handheld communication devices in a
personalized fashion.

SUMMARY

Embodiments of the invention relate to methods and systems for providing
customized "haptic messaging" to users of handheld communication devices in a variety of
applications.

In one embodiment, a method of providing haptic messaging to a hand-
communication device includes: receiving an input signal associated with a reminder event;

and outputting a control signal to an actuator coupled to the hand communication device, the control signal configured to cause the actuator to output a haptic effect associated with the reminder event.

In another embodiment, a method of providing haptic messaging to a hand communication device includes: receiving an input signal associated with a status event; and outputting a control signal to an actuator coupled to the hand communication device at a prescribed time after receiving the input signal, the control signal configured to cause the actuator to output a haptic effect associated with the status event.

Further details and advantages of embodiments of the invention are set forth below.

BRIEF DESCRIPTION OF THE FIGURES

These and other features, aspects, and advantages of the present invention are better understood when the following Detailed Description is read with reference to the accompanying drawings, wherein:

FIG. 1 depicts a block diagram of a haptic handheld communication device according to an embodiment of the present invention;

FIG. 2 shows a flowchart depicting a method of using customized haptic effects to convey information to users of handheld communication devices, according to an embodiment of the invention;

FIG. 3 shows a flowchart depicting a method of using haptic logos to relate information to users of handheld communication devices, according to an embodiment of the invention;

FIG. 4 shows a flowchart depicting a method of haptically encoding communication signals, according to an embodiment of the invention;

FIG. 5 shows a flowchart depicting a method of providing haptic messaging to users of handheld communication devices, according to a further embodiment of the invention;

FIG. 6 shows a flowchart illustrating a method of providing an interactive virtual touch in one embodiment of the present invention;

FIG. 7 depicts a flowchart illustrating a method of carrying out a chat session using handheld communication devices, according to an embodiment of the invention;

FIG. 8 shows a flowchart depicting a method of using haptic effects to relate navigation information, according to an embodiment of the invention; and

FIG. 9 shows a flowchart illustrating a method for providing haptic effects to a remote control in one embodiment of the present invention.

DETAILED DESCRIPTION

Embodiments described in the following description are provided by way of example to illustrate some general principles of the invention, and should not be construed as limiting the scope of the invention in any manner. One skilled in the art would also recognize that various changes and modifications can be made herein, without departing from the principles and scope of the invention.

FIG. 1 depicts a block diagram of a handheld communication device 100 according to an embodiment of the invention. It will be appreciated that various elements are shown in schematic form for illustrative purposes and are not drawn to scale. It will also be appreciated that many alternative ways of practicing the present invention exist. Accordingly, various changes and modifications may be made herein, without departing from the principles and scope of the invention.

Device 100 includes a device body including a housing 110 and a user-interface 112; a processor 120; at least one actuator 130 in communication with processor 120; and a memory 140 in communication with processor 120. Device 100 also includes an antenna 150 and a transceiver 160, in communication with processor 120. Device 100 additionally includes a display module 170 and an audio module 180, in communication with processor 120. Display module 170 may include, for example, a liquid crystal device. Audio means 180 may include, for example, a speaker, a microphone, and the like.

For purpose of illustration in the embodiment of FIG. 1, processor 120, actuator 130, and memory 140 are shown to be enclosed within and coupled to the device body. Such an illustration, however, should not be construed as limiting the scope of the invention in any manner. In alternative embodiments, actuator 130 may, for example, be coupled to the outside of housing 110, or embedded in housing 110 via a suitable mechanism. Further, user-interface 112 may include one or more user-interface members. As used herein, a user-interface member includes, without limitation, a key pad having one or more keys, one or more buttons, a touch screen or touch pad, a scroll wheel, a direction pad, a trackball, a knob, a miniature joystick, or other user-interface means known in the art.

Device 100 further includes an API (Application Program Interface) 190, working in conjunction with an operating system 195. A device driver (not shown) may optionally provide an interface between operating system 195 and processor 120.

Memory 140 of device 100 stores a program code that includes instructions to cause processor 120 to perform various tasks. The following description provides some examples.

FIG. 2 shows a flowchart 200 depicting a method of using customized haptic effects to convey information to users of handheld communication devices, according to an embodiment of the invention. At step 210, an input signal associated with an event is received. At step 220, a source of the event is determined and a control signal is selected
5 based on the determination. At step 230, a control signal is output to an actuator coupled to a handheld communication device (see FIG. 1 for an embodiment of such device). The control signal is configured to cause the actuator to output a haptic effect associated with the event.

Furthermore at step 240, a collection of haptic effects is provided, each haptic effect being associated with a control signal. For example, memory 140 of FIG. 1 can store a
10 program code that includes instructions to generate the control signals (e.g., each characterized by a distinct waveform) for rendering the corresponding haptic effects. Haptic effects (along with associated control signals) may also be downloaded or transmitted from a remote source, such as a service provider, a network resource, a Web server, a remote handheld communication device or computer. Such downloaded or transmitted haptic effects
15 can be further edited or modified. At step 250, a mapping between an event of interest and one of the stored haptic effects is received. By way of example, memory 140 of FIG. 1 may also store a program code that enables a user to map an event of interest to one of the haptic effects as provided, e.g., via user-interface 112 through API 190, where the event may be identified by its source. At step 260, the one-to-one mappings made between various events
20 of interest and the corresponding haptic effects are compiled into a haptic lookup table, which can, for example, be stored in memory 140 of FIG. 1.

In the embodiment of FIG. 2, the term "selecting" includes, without limitation, looking up a predetermined mapping between the event of interest and a corresponding haptic effect based on the source determination, and selecting/generating a control signal that is
25 configured to render the desired haptic effect associated with the event (e.g., upon being applied to an actuator). Selection can be made based upon the aforementioned haptic lookup table, for example.

In one embodiment, the input signal may include a communication signal associated with a call event, such as a voice call, an e-mail, or a message in text or multimedia form,
30 which may be received via antenna 150 and transceiver 160 of FIG. 1, for example. The "source" of a call event may be related to a characteristic that distinctly identifies or characterizes the call event, such as the caller's phone number, the sender's e-mail address, a graphical feature or an icon associated with the incoming message, etc.

In another embodiment, the input signal may be associated with a reminder event, which may be a self-generated message on the handheld communication device serving as a reminder for a pre-scheduled activity (e.g., an appointment or a meeting). The source in this scenario may be associated with the type of a pre-scheduled activity (e.g., a business meeting vs. a restaurant reservation), or the time at which the pre-scheduled activity takes place.

In yet another embodiment, the input signal may include a communication signal associated with a status event, for example, received via antenna 150 and transceiver 160 of FIG. 1. Examples of a status event include, but are not limited to: an advertisement (e.g., sale) event, a one-to-one marketing event, a business-transaction event, a stock-trading event, a weather-forecast event, a sports (or game) event, an entertainment event, and an emergency (e.g., 911) event. In this scenario, the source may be associated with a characteristic that distinctly identifies the sender and/or the nature of a status event, such as the phone number of the handheld user's stock broker, the e-mail address of the user's favorite store, the logo associated with the user's favorite TV or radio station, and so on.

In one embodiment, an event of interest can be accompanied by a distinct haptic effect, or overlapping haptic effects, conveying to the user customized information such as "who is calling," "what is happening," and so on. The user can also be allowed to update the haptic lookup table, e.g., to include new events, and/or to modify the mappings between the existing events of interest and the corresponding haptic effects.

Moreover, a specific haptic effect can be assigned to any incoming signal event whose source is unknown, so as to alert the user that the incoming message is from an unidentifiable or sender.

As used herein, the term "handheld communication device" includes, without limitation, a mobile phone such as a cellular phone or a satellite phone, a personal digital assistant (PDA), a cordless telephone, a pager, a two-way radio, a handheld or portable computer, a game console controller, a personal gaming device, an MP3 player, or other personal electronic devices known in the art that are equipped with communication or networking capabilities.

In one embodiment, the aforementioned haptic effects can be used as haptic ringers (e.g., counterparts to auditory ring tones) that are customized or personalized to convey information to the user about various events of interest. By way of example, a haptic ringer associated with a call from a loved one (e.g., the user's spouse) may comprise low-amplitude and high frequency vibrations that impart gentle sensations to the user. In contrast, a haptic

ringer associated with an emergency event (such as a 911-call) may comprise jolt-like pulses that impart pounding sensations to the user.

5 In contrast with conventional auditory ring tones, the aforementioned haptic effects (e.g., haptic ringers) are more desirable in an environment where extraneous auditory signals are prohibited (e.g., during a meeting or a concert), and/or where it is difficult to distinguish
10 auditory signals (e.g., in a loud environment such as an airport). The haptic ringers are also more suitable in distracting situations such as driving, so that the user of a handheld communication device can keep eyes on the road without having to look at the device. Moreover, such haptic ringers convey customized information to the user, so that the user is
15 aware of "who is calling," "what is happening," and so on, as the following examples further illustrate.

A handheld communication device such as a mobile phone may be configured to allow a user to include haptic information or a haptic code in an outgoing communication signal, e.g., carrying a voice call, an e-mail, or a message. The encoding of a communication
20 signal with haptic information may be based on an established scheme or protocol, and/or on a per-system basis. The haptic code is configured to cause a haptic effect to be output when the communication signal is delivered to another handheld communication device. In one embodiment, businesses and organizations may each be associated with a distinct haptic logo (e.g., a particular vibration pattern) and include their haptic logos in various messages sent to
25 the handheld communication devices of their customers. Such haptic logos can serve as counterparts to conventional logos known in the art, for example. Various status events mentioned above may also be transmitted in this manner. By way of example, a merchant may include its haptic logo in various advertisement events and business transaction events to be transmitted to the handheld communication devices of its customers. Stock brokers (or
30 brokerage firms), TV or radio stations, and marketing/advertising agencies may likewise include their haptic logos in various stock-trading events, weather-forecast events, sports events, entertainment events, and one-to-one marketing events to be transmitted to the handheld users.

FIG. 3 shows a flowchart 300 depicting a method of using haptic logos to relate
35 information to users of handheld communication devices, according to an embodiment of the invention. A handheld communication device receives an input signal at step 310, the input signal being associated with a status event. The handheld communication device extracts a haptic code from the input signal at step 320, where the haptic code is associated with a haptic logo. At step 330, the handheld communication device provides a haptic effect.

associated with the haptic logo. Step 330 may include providing a control signal to an actuator coupled to the handheld communication device, where the control signal is based at least in part on the haptic code and configured to cause the actuator to output the haptic effect.

5 In one embodiment, the extracted haptic code may be directly applied to the actuator for rendering the desired haptic effect. In another embodiment, the haptic code may be configured according to a predetermined scheme or protocol that includes, for example, a table of haptic codes (some of which may be associated with one or more haptic logos) versus control signals for rendering the corresponding haptic effects. In this way, a processor in the
10 handheld communication device can look up the corresponding control signal from the table based on the extracted haptic code, and output the selected control signal to the actuator for rendering the desired haptic effect.

15 In the embodiments of FIG. 2 or 3, the handheld communication device (or the haptic code) may be programmed such that the haptic effect is output immediately, or at a prescribed time after receiving the input signal, as desired in applications. The haptic effects can also be triggered by, or synchronized with, other occurrences.

20 A handheld communication device may be further configured such that some of its user-interface members (such as those described above) are each associated with a haptic code, e.g., according to a predetermined scheme or protocol. In one embodiment, some of these haptic codes may be associated with haptic effects that emulate expressions or behaviors, such as "laugh," "giggle," "hug," "high-five," "heartbeat," "pet purring," etc. This allows haptic effects to be transmitted and experienced, e.g., in an interactive conversation or a chat session, by pressing or manipulating such members.

25 By way of example, suppose that user A (termed "Alice" herein) is engaged in a chat session with user B (termed "Bob" herein) via their respective mobile phones. In one embodiment, when Bob tells Alice a joke, Alice can respond by sending a "laugh" sensation to Bob, e.g., by pressing a key on her mobile phone that is assigned with a haptic code corresponding to a laugh sensation. This causes a signal to be transmitted from Alice's phone to Bob's phone, and a corresponding haptic effect to be output to Bob's phone (and thereby
30 experienced by Bob). In alternative embodiments, Alice can include a haptic code in an outgoing message (which may also contain a video image such as a picture taken by her mobile phone, and/or a graphical feature such as an emoticon emulating a smiley face) to be transmitted to Bob, e.g., by pressing the corresponding user-interface member. The haptic code causes a haptic effect to be output when the message is delivered to a remote device

such as Bob's mobile phone. In one embodiment, the haptic effect may be correlated or synchronized with the displaying of a video image contained in the message. In another embodiment, the generation of the haptic effect based on the haptic code may be carried out in a manner similar to that described above with respect to the embodiment of FIG. 3.

5 FIG. 4 depicts a flowchart 400 illustrating a method of a method of haptically encoding communication signals, according to an embodiment of the invention. At step 410, an input signal associated with an actuation of a user-interface member is received. By way of example, the input signal may be associated with Alice's pressing or manipulating a particular user-interface member. At step 420, a haptic code associated with the actuation is
10 determined. At step 430, the haptic code is included in an output signal, and the output signal is sent to a remote handheld communication device. As described above, the output signal may also include a message, a video image, and/or a graphical feature.

 A handheld communication device may also be configured such that a haptic effect, along with a message, is output upon a contact with a user-interface member being made
15 (e.g., by a user or an input device). FIG. 5 depicts a flowchart 500 illustrating a method of haptic message that can be associated with this situation, according to an embodiment of the invention. At step 510 of the flowchart 500, a handheld communication device receives an input signal. At step 520, the handheld communication device outputs a request for a contact with a user-interface member coupled to the handheld communication device. At step 530,
20 the handheld communication device provides a control signal associated with the contact to an actuator coupled to the handheld communication device. The control signal is configured to cause the actuator to output a haptic effect associated with the input signal. Step 520 may include having a visual effect displayed, an auditory effect played, and/or a distinctive haptic ringer output, which requests a contact with the user-interface member being made.

25 In one embodiment, the input signal in FIG. 5 may include a haptic code, along with a message, a video image, and/or a graphical feature, etc. For example, the haptic code may be configured to cause a "hug" sensation to be output when the video image contained in the input signal is displayed. The input signal may also contain a provision or protocol that specifies that the incoming message along with the corresponding haptic effect is output upon
30 a contact with a particular user-interface member (e.g., the #5 key) being made. Alternatively, the handheld communication device may determine the user-interface member to be contacted, before outputting incoming message along with the corresponding haptic effect.

In another embodiment, the input signal of FIG. 5 may be associated with a "virtual touch," e.g., to mimic a handshake, a "high-five," a pat on the back, a pulse or heartbeat sensation, a pet purring sensation, or other touch sensations associated with human (and/or human-animal) interactions. In one scenario, the input signal at step 510 may include a "virtual touch indicator," based on which the request for a contact with a particular user-interface member is made. The virtual touch indicator may be in the form of a haptic code, a message, or other informative means. The control signal at step 530 may be generated, e.g., based on the virtual touch indicator, a haptic code associated with the user-interface member at play, or other predetermined scheme. The input signal at step 510 may also include a virtual touch indicator along with a virtual touch signal for rendering the desired haptic effect. In this case, the control signal at step 530 may be based on the virtual touch signal.

Referring back to the chat session between Alice and Bob, by way of example at the end of their chat session, Alice may wish to send Bob a "high-five." She sends to Bob's mobile phone a signal including a virtual touch indicator, which in turn prompts a request that Bob be in contact with a user-interface member coupled to his phone, such as a direction pad (e.g., by putting his fingers on the individual keys of the direction pad), a key pad, a touch screen, a trackball, a joystick, or the like. The control signal for rendering a haptic effect that emulates a "high-five" may be based on the haptic code associated with the user-interface member, transmitted with the input signal from Alice, and/or other predetermined scheme.

Interactive virtual touch can also be engaged between users of handheld communication devices, where the manipulation of a user-interface member on one handheld communication device is transmitted possibly in substantially real-time to another handheld device and experienced by its user, and vice versa. FIG. 6 depicts a flowchart 600 illustrating a method of providing interactive virtual touch in one embodiment of the present invention. In the embodiment shown, a handheld communication device first receives an input signal including a virtual touch indicator at step 610. A distinctive haptic ringer may, for example, accompany the arrival of the virtual touch indicator, identifying the sender and the nature of the input signal. The handheld communication device may then perform any necessary initialization to enable the communication at step 620, which may also include requesting a contact with a particular user-interface member coupled to the handheld communication device at step 625. The handheld communication device subsequently receives a virtual touch signal in the communication associated with the desired haptic effect at step 630. The handheld communication device provides the haptic effect at step 640, e.g., by applying the virtual touch signal to an actuator coupled to the user-interface member.

In one embodiment, the virtual touch signal may be associated with the manipulation of a user-interface member on a remote handheld device and transmitted in substantially real-time. And the user on the receiving end may respond by acting in a similar fashion, so as to emulate an interactive touch. Any schemes for delivering virtual touch to users of handheld communication devices may be used.

Haptic effects can also be used to enhance and complement the information content communicated between handheld communication devices. In one embodiment, a plurality of handheld communication users may be engaged in a chat session via their handheld communication devices. The users may each have a graphical representation or avatar displayed on other handheld communication devices. Such avatars can also be haptically enabled, for example, whereby their expressions and/or behaviors are accompanied and enhanced by corresponding haptic effects. FIG. 7 is a flowchart 700 depicting a method of carrying out a chat session using handheld communication devices, according to an embodiment of the invention. In the embodiment shown, a handheld communication device receives an input signal associated with a chat message at step 710. The handheld communication device displays an avatar associated with the chat message at step 720. The avatar may be shown on display 170 of FIG. 1, in one embodiment. At step 730, the handheld communication device provides a haptic effect associated with the chat message. Step 730 may include outputting a control signal to an actuator coupled to the handheld communication device, where the control signal is configured to cause the actuator to output the haptic effect. In one embodiment, the haptic effect may be correlated with an expression or behavior of the avatar, such as a laugh or giggle, a cry, a pet purring, or the like.

Handheld communication devices are increasingly equipped with navigation capability, for example, in communication with the Global Position System (GPS) or other navigation systems. Haptic effects can also be used to convey navigation information, such as positional and/or directional information, to handheld users. By way of example, FIG. 8 shows a flowchart 800 depicting a method of haptic navigation, according to an embodiment of the present invention. The flowchart 800 discloses receiving an input signal associated with a position of a handheld communication device at step 810; determining the position of a handheld communication device relative to a predetermined location at step 820; and providing a haptic effect associated with the determination at step 830. Step 830 may include outputting a control signal associated with the determination to an actuator coupled to the handheld communication device, the control signal being configured to cause the actuator to

output the haptic effect. Further, the input signal at step 810 may be received from GPS, a digital compass, or other navigation systems known in the art.

In one embodiment, the haptic effect may be associated with a distance between the position of the handheld communication device and a predetermined location (termed "destination" herein). For example, the haptic effect may include a vibration having a magnitude and a frequency, where at least one of the magnitude and the frequency decreases as the distance from the destination diminishes. Additionally, the haptic effect may be configured to convey a quantitative measure of the distance. By way of example, the haptic effect may include one or more pulse or jolt sensations, where the number of pulses is proportional to the number of miles between the position of the handheld device and the destination.

Processors described above (including processor 120 of FIG. 1) can include, for example, one or more digital logical processors capable of processing input, execute algorithms, and generate output as necessary to perform various tasks, such as those described above. Such processors/controllers may include a microprocessor, an Application Specific Integrated Circuit (ASIC), and state machines. Such processors include, or may be in communication with, media (including memory 140 of FIG. 1). Such media include, for example, computer readable media, which stores program code that, when executed by a processor, cause the processor to perform the steps described herein. Embodiments of computer-readable media include, but are not limited to, an electronic, optical, magnetic, or other storage or transmission device capable of providing a processor, such as the processor in a web server, with computer-readable instructions. Other examples of suitable media include, but are not limited to, a floppy disk, CD-ROM, magnetic disk, memory chip, ROM, RAM, ASIC, configured processor, all optical media, all magnetic tape or other magnetic media, or any other medium from which a computer processor can read. Also, various other forms of computer-readable media may transmit or carry instructions to a computer, including a router, private or public network, or other transmission device or channel.

Program code and associated application programs related to various applications may also reside on a remote source, such as a network resource, a Web server, a remote handheld communication device or computer, which can be transmitted or downloaded to a handheld communication device on a regular or predetermined basis. Haptic effects (along with associated control signals) can also be downloaded or transmitted from a remote source, as described above.

Actuators described above (including actuator 130 shown in FIG. 1) can include, for example, a pager motor, an eccentric rotating motor, a harmonic eccentric rotating motor, a voice coil, a solenoid, a resistive actuator, a piezoelectric actuator, an electro-active polymer actuator, or other types of active/passive actuators suitable for generating haptic effects. U.S. Patent Nos. 6,429,846 and 6,424,333 disclose further details relating to some of these actuators, both of which are incorporated in full herein by reference. In some embodiments, one or more actuators may be implemented in a handheld communication device, configured to deliver appropriate haptic effects. It will be appreciated that various control schemes can be devised accordingly, for controlling the actuator(s) in a manner that best achieves the desired haptic effects.

Referring back to FIG. 1. In one embodiment, actuator 130 may be coupled to housing 110, thereby imparting haptic effects thus generated to the device body. Haptic ringers (or alerts) described above may be delivered in this manner, for instance. In another embodiment, actuator 130 may be coupled to user-interface 112 of the device body. For instance, an active and/or resistive actuator can be coupled to user-interface 112 to deliver a virtual touch described above. One or more actuators can also be coupled to user-interface 112, for example, to convey a virtual touch such to a user. In yet another embodiment, a plurality of actuators can be coupled to housing 110 as well as user-interface 112. In addition, one or more actuators may also be coupled to a headset, a wristband, or other accessory means associated with a handheld communication device.

Embodiments of the invention include the following.

In one embodiment, an individual (or "Bob") can have a mobile phone according to the invention. The mobile phone also has an e-mail capability, for example, including both "receive" and "send"). The mobile phone is configured to provide a plurality of haptic effects, e.g., by including appropriate hardware (such as actuators described above) and program code. Bob can program the mobile phone, for example, via user-interface 112 through API 150 shown in FIG. 1, by inputting various events of interest and associating each with a distinct haptic effect. Thus, when an event of interest is subsequently received, the mobile phone provides the corresponding haptic effect.

In one embodiment, Bob's phone includes programming that provides a first haptic effect when an input signal is received from the mobile phone of Bob's wife (or "Alice"). Bob's phone also includes programming that provides a second haptic effect that is different and distinct from the first haptic effect, when an input signal is received from the mobile phone of Bob's supervisor at work (termed "Carol" herein). Bob's phone is further be

configured to provide a third haptic effect that is different from the two mentioned above, e.g., when an e-mail is received from the e-mail address of Bob's stock broker (where the e-mail contains a "smiley-face" emoticon, for instance). The third haptic effect can be a vibration with high magnitude and short duration, e.g., to emulate a "high-five."

5 In another embodiment, Bob can be watching a movie in a theater with his mobile phone in his pocket. It is set to make no noise, because Bob is in a theater. While Bob is watching the movie, Bob's mobile phone vibrates with the second haptic effect mentioned above. Bob chooses to ignore the call, because he does not wish to speak with his supervisor at a movie theater. Later, Bob's mobile phone vibrates with the first haptic effect. Bob wants
10 to speak with Alice, for example, to make plans to meet later. So Bob answers the phone and quickly exits the theater to talk with Alice.

Bob's mobile phone can also include a personal schedule/calendar application. After speaking with Alice, Bob can enter an entry in the calendar at the 7:00PM time mark -- "Meet Alice". Bob can also choose a fourth haptic effect to associate with the calendar entry. The
15 mobile phone can be programmed to output the fourth haptic effect fifteen minutes before the time entry of the calendar (i.e., at 6:45PM).

Bob's mobile phone can be equipped with GPS capability, along with an associated application program for location determination. Bob can also store addresses of various locations of interest in the application program. In one embodiment, Bob can be on the road.
20 Bob's mobile phone vibrates with a distinct fifth haptic effect. Bob recognizes the fifth haptic effect being associated with the haptic logo of his favorite electronics store. He then checks with the application program, and receives a sixth haptic effect associated with the distance between his current position and the store location. Bob then decides to make a stop at the store.

25 A haptically-enabled handheld communication device of the invention may be further used as a two-way haptic remote control, for example, for controlling a remote system such as a Television set or a multimedia system. In one embodiment, the events as referred to above may be related to program channels shown on the remote system, each identified by a channel number (which may be used as the "source"), for instance. The corresponding haptic
30 effects may be customized on a per-channel basis. Such haptic effects can serve to inform a user as to which channel is on, as a user is channel-surfing by way of this haptic remote control, so that the user need not to look up the display screen.

FIG. 9 depicts a flowchart illustrating a method for providing haptic effects to a remote control in one embodiment of the present invention. In the embodiment shown, the

remote control sends a command signal to a remote system at step 910. As with a conventional remote control, the signal may or may not reach the television. The remote control then determines whether a feedback signal has been received at step 920. If the remote control receives a feedback signal, the remote control provides a first haptic effect at step 930. If not, the remote control provides a second haptic effect at step 940.

The first haptic effect can be further customized according to the received feedback signal. In one embodiment, the remote system provides information (e.g., via the feedback signal) to the remote control regarding the state of the display, e.g., based on a predetermined scheme. The remote control may use the information to determine a corresponding haptic effect to provide at step 930. In alternative embodiments, the remote system may determine the appropriate haptic effect to provide and include a corresponding haptic code in the feedback signal. The remote control provides the haptic effect at step 930 based on this haptic code.

The foregoing description of the preferred embodiments of the invention has been presented only for the purpose of illustration and description and is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Numerous modifications and adaptations thereof will be apparent to those skilled in the art without departing from the spirit and scope of the present invention.

That which is claimed is:

1. A method, comprising:

receiving an input signal associated with a reminder event; and

outputting a control signal to an actuator, the control signal configured to cause the actuator to output a haptic effect associated with the reminder event.

2. The method of claim 1 wherein the reminder event includes one of an appointment, a meeting, and a pre-scheduled activity.

3. The method of claim 1 further comprising determining a source of the reminder event and selecting the control signal based at least in part on the determination.

4. The method of claim 1 wherein the haptic effect is output to a handheld communication device.

5. A method, comprising:

receiving an input signal associated with a status event; and

outputting a control signal to an actuator at a prescribed time after receiving the input signal, the control signal configured to cause the actuator to output a haptic effect associated with the status event.

6. The method of claim 5 wherein the status event includes one of an advertisement event, a business-transaction event, a one-to-one marketing event, a stock-trading event, a weather-forecast event, an entertainment event, a sports event, and an emergency event.

7. The method of claim 5 further comprising determining a source of the status event and selecting the control signal based at least in part on the determination.

8. The method of claim 5 further comprising extracting a haptic code from the input signal, the control signal being based at least in part on the haptic code.

9. The method of claim 5 wherein the haptic effect is output to a handheld communication device.

10. A computer-readable medium on which is encoded program code, comprising:

program code for receiving an input signal associated with a reminder event; and

program code for outputting a control signal to an actuator, the control signal configured to cause the actuator to output a haptic effect associated with the reminder event.

11. The computer-readable medium of claim 10 wherein the reminder event includes one of an appointment, a meeting, and a pre-scheduled activity.

12. The computer-readable medium of claim 10 further comprising program code for determining a source of the reminder event and selecting the control signal based at least in part on the determination.

13. The computer-readable medium of claim 12 further comprising program code to generate a plurality of control signals, each control signal being associated with a haptic effect.

14. A computer-readable medium on which is encoded program code, comprising:
5 program code for receiving an input signal associated with a status event; and
program code for outputting a control signal to an actuator at a prescribed time after receiving the input signal, the control signal configured to cause the actuator to output a haptic effect associated with the status event.

15. The computer-readable medium of claim 14 wherein the status event includes one of
10 an advertisement event, a business-transaction event, a one-to-one marketing event, a stock-trading event, a weather-forecast event, an entertainment event, a sports event, and an emergency event.

16. The computer-readable medium of claim 14 further comprising program code for determining a source of the status event and selecting the control signal based at least in part
15 on the determination.

17. The computer-readable medium of claim 14 further comprising program code for extracting a haptic code from the input signal, the control signal being based at least in part on the haptic code.

18. A data stream embodied in a carrier signal, carrying instructions to
20 receive an input signal associated with a reminder event; and
output a control signal to an actuator, the control signal configured to cause the actuator to output a haptic effect associated with the reminder event.

19. A data stream embodied in a carrier signal, carrying instructions to
25 receive an input signal associated with a status event; and
output a control signal to an actuator at a prescribed time after receiving the input signal, the control signal configured to cause the actuator to output a haptic effect associated with the status event.

20. An apparatus, comprising:
30 a body;
a processor;
an actuator coupled to the body and in communication with the processor; and
a memory in communication with the processor, the memory storing program code executable by the processor, including:

program code for receiving an input signal associated with a reminder event;
and

program code for outputting a control signal to an actuator, the control signal
configured to cause the actuator to output a haptic effect associated with the reminder
event.

21. The apparatus of claim 20 wherein the body is included in a handheld communication
device.

22. The apparatus of claim 21 wherein the handheld communication device includes one
of a cellular phone, a satellite phone, a cordless phone, a personal digital assistant, a pager, a
two-way radio, a portable computer, a game console controller, a personal gaming device,
and an MP3 player.

23. The apparatus of claim 20 wherein the reminder event includes one of an
appointment, a meeting, and a pre-scheduled activity.

24. The apparatus of claim 20 wherein the memory further stores program code for
determining a source of the reminder event and selecting the control signal based at least in
part on the determination.

25. The apparatus of claim 24 wherein the memory further stores a haptic lookup table,
the selection being based on the haptic lookup table.

26. The apparatus, comprising:

a body;

a processor;

an actuator coupled to the body and in communication with the processor; and

a memory in communication with the processor, the memory storing program code
executable by the processor, including:

program code for receiving an input signal associated with a status event; and

program code for output a control signal to an actuator at a prescribed time
after receiving the input signal, the control signal configured to cause the actuator to
output a haptic effect associated with the status event.

27. The apparatus of claim 26 wherein the body is included in a handheld communication
device.

28. The apparatus of claim 27 wherein the handheld communication device includes one
of a cellular phone, a satellite phone, a cordless phone, a personal digital assistant, a pager, a
two-way radio, a portable computer, a game console controller, a personal gaming device,
and an MP3 player.

29. The apparatus of claim 26 wherein the status event includes one of an advertisement event, a business-transaction event, a one-to-one marketing event, a stock-trading event, a weather-forecast event, an entertainment event, a sports event, and an emergency event.

5 30. The apparatus of claim 26 wherein the memory further stores program code for determining a source of the status event and selecting the control signal based at least in part on the determination.

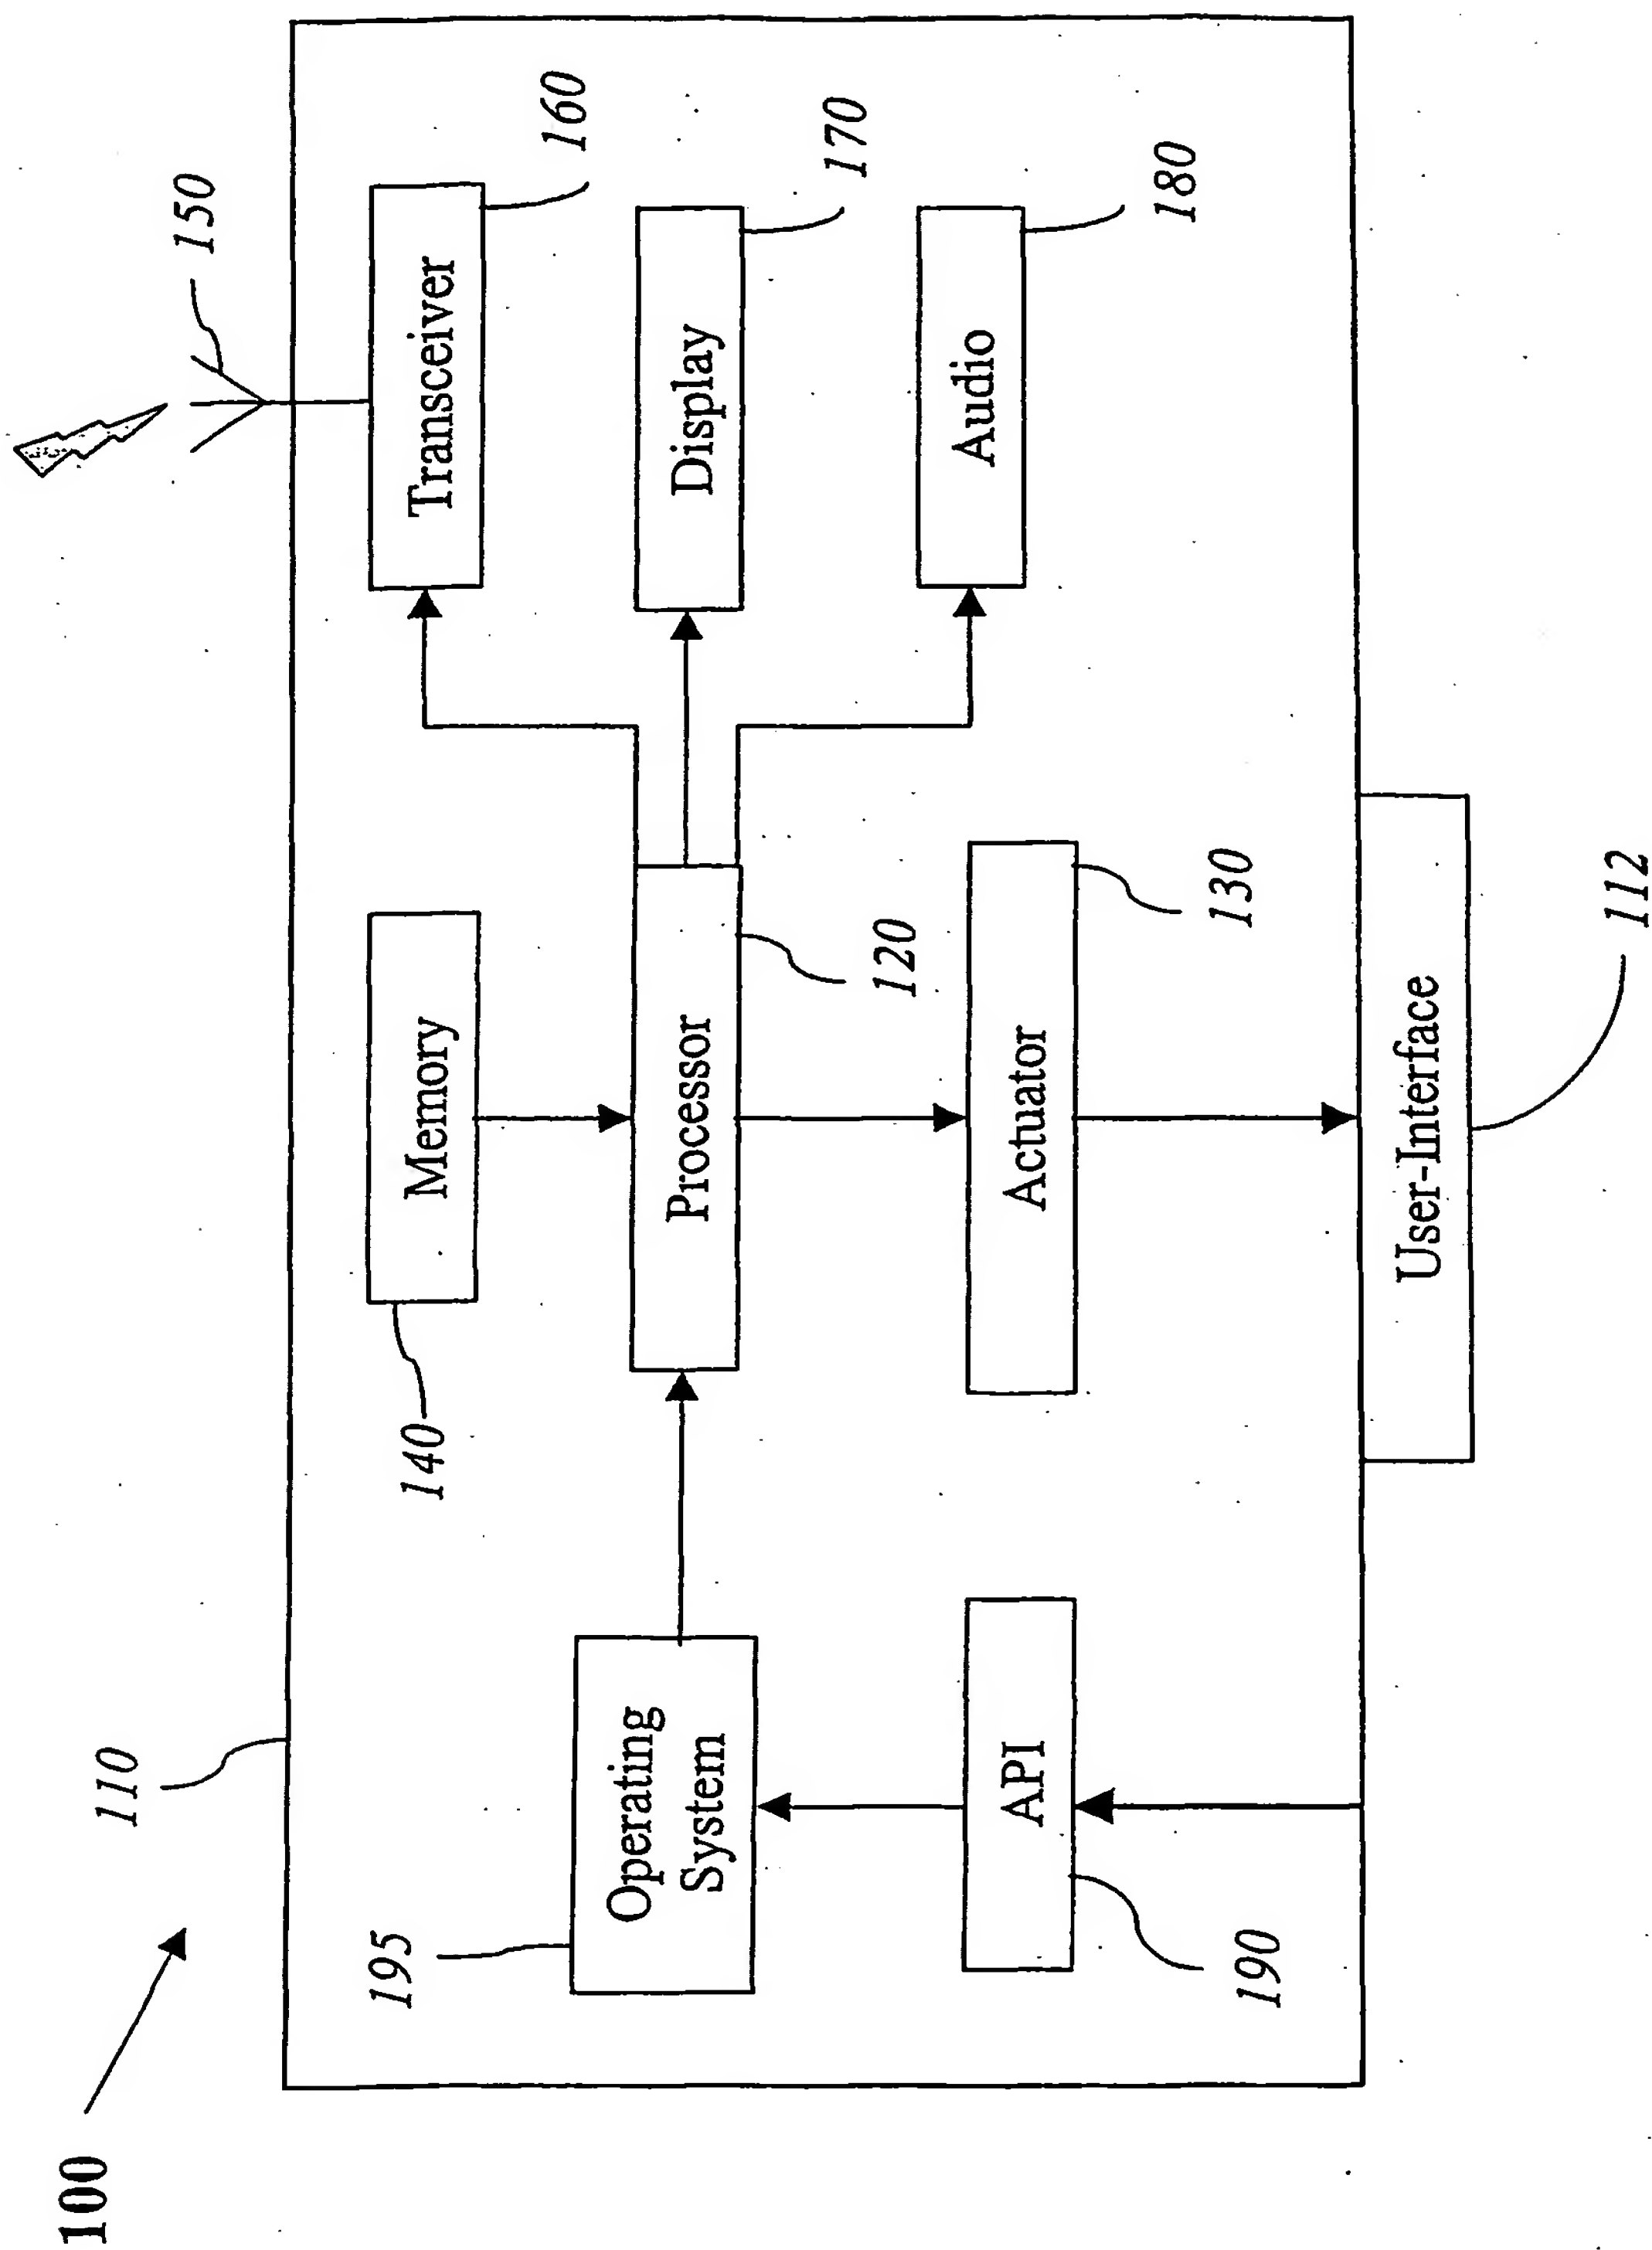


FIG. 1

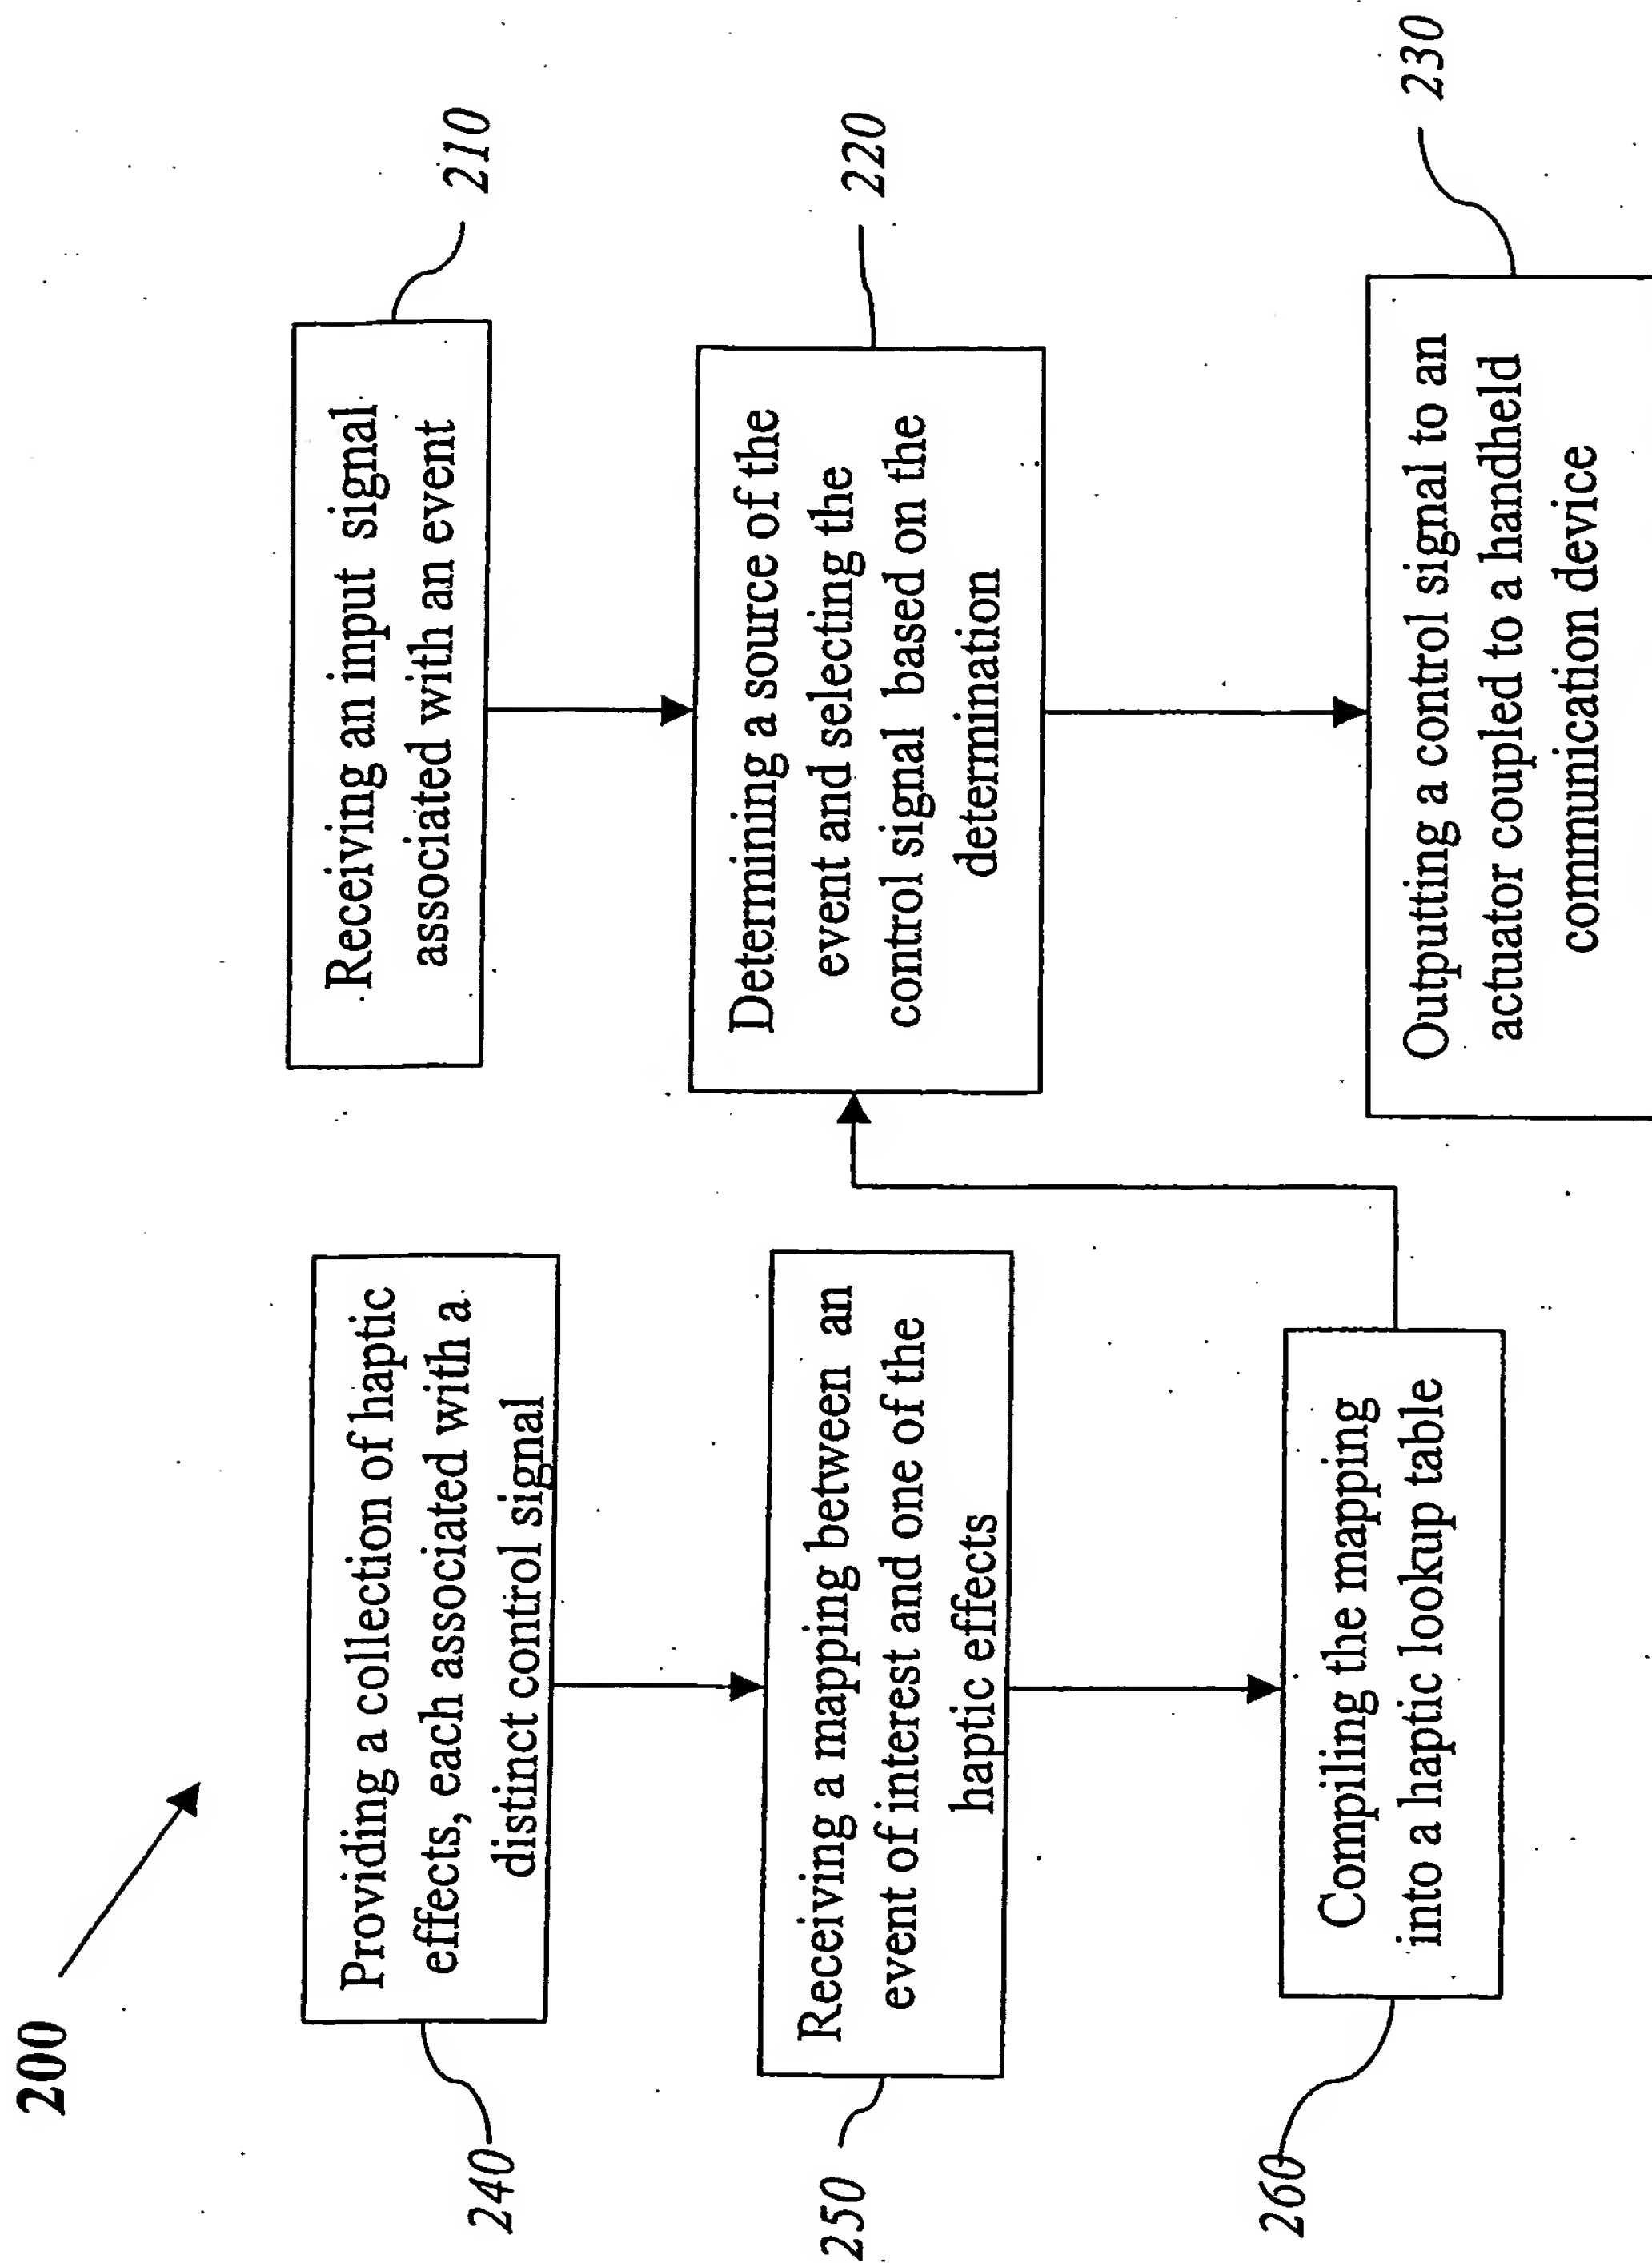


FIG.2

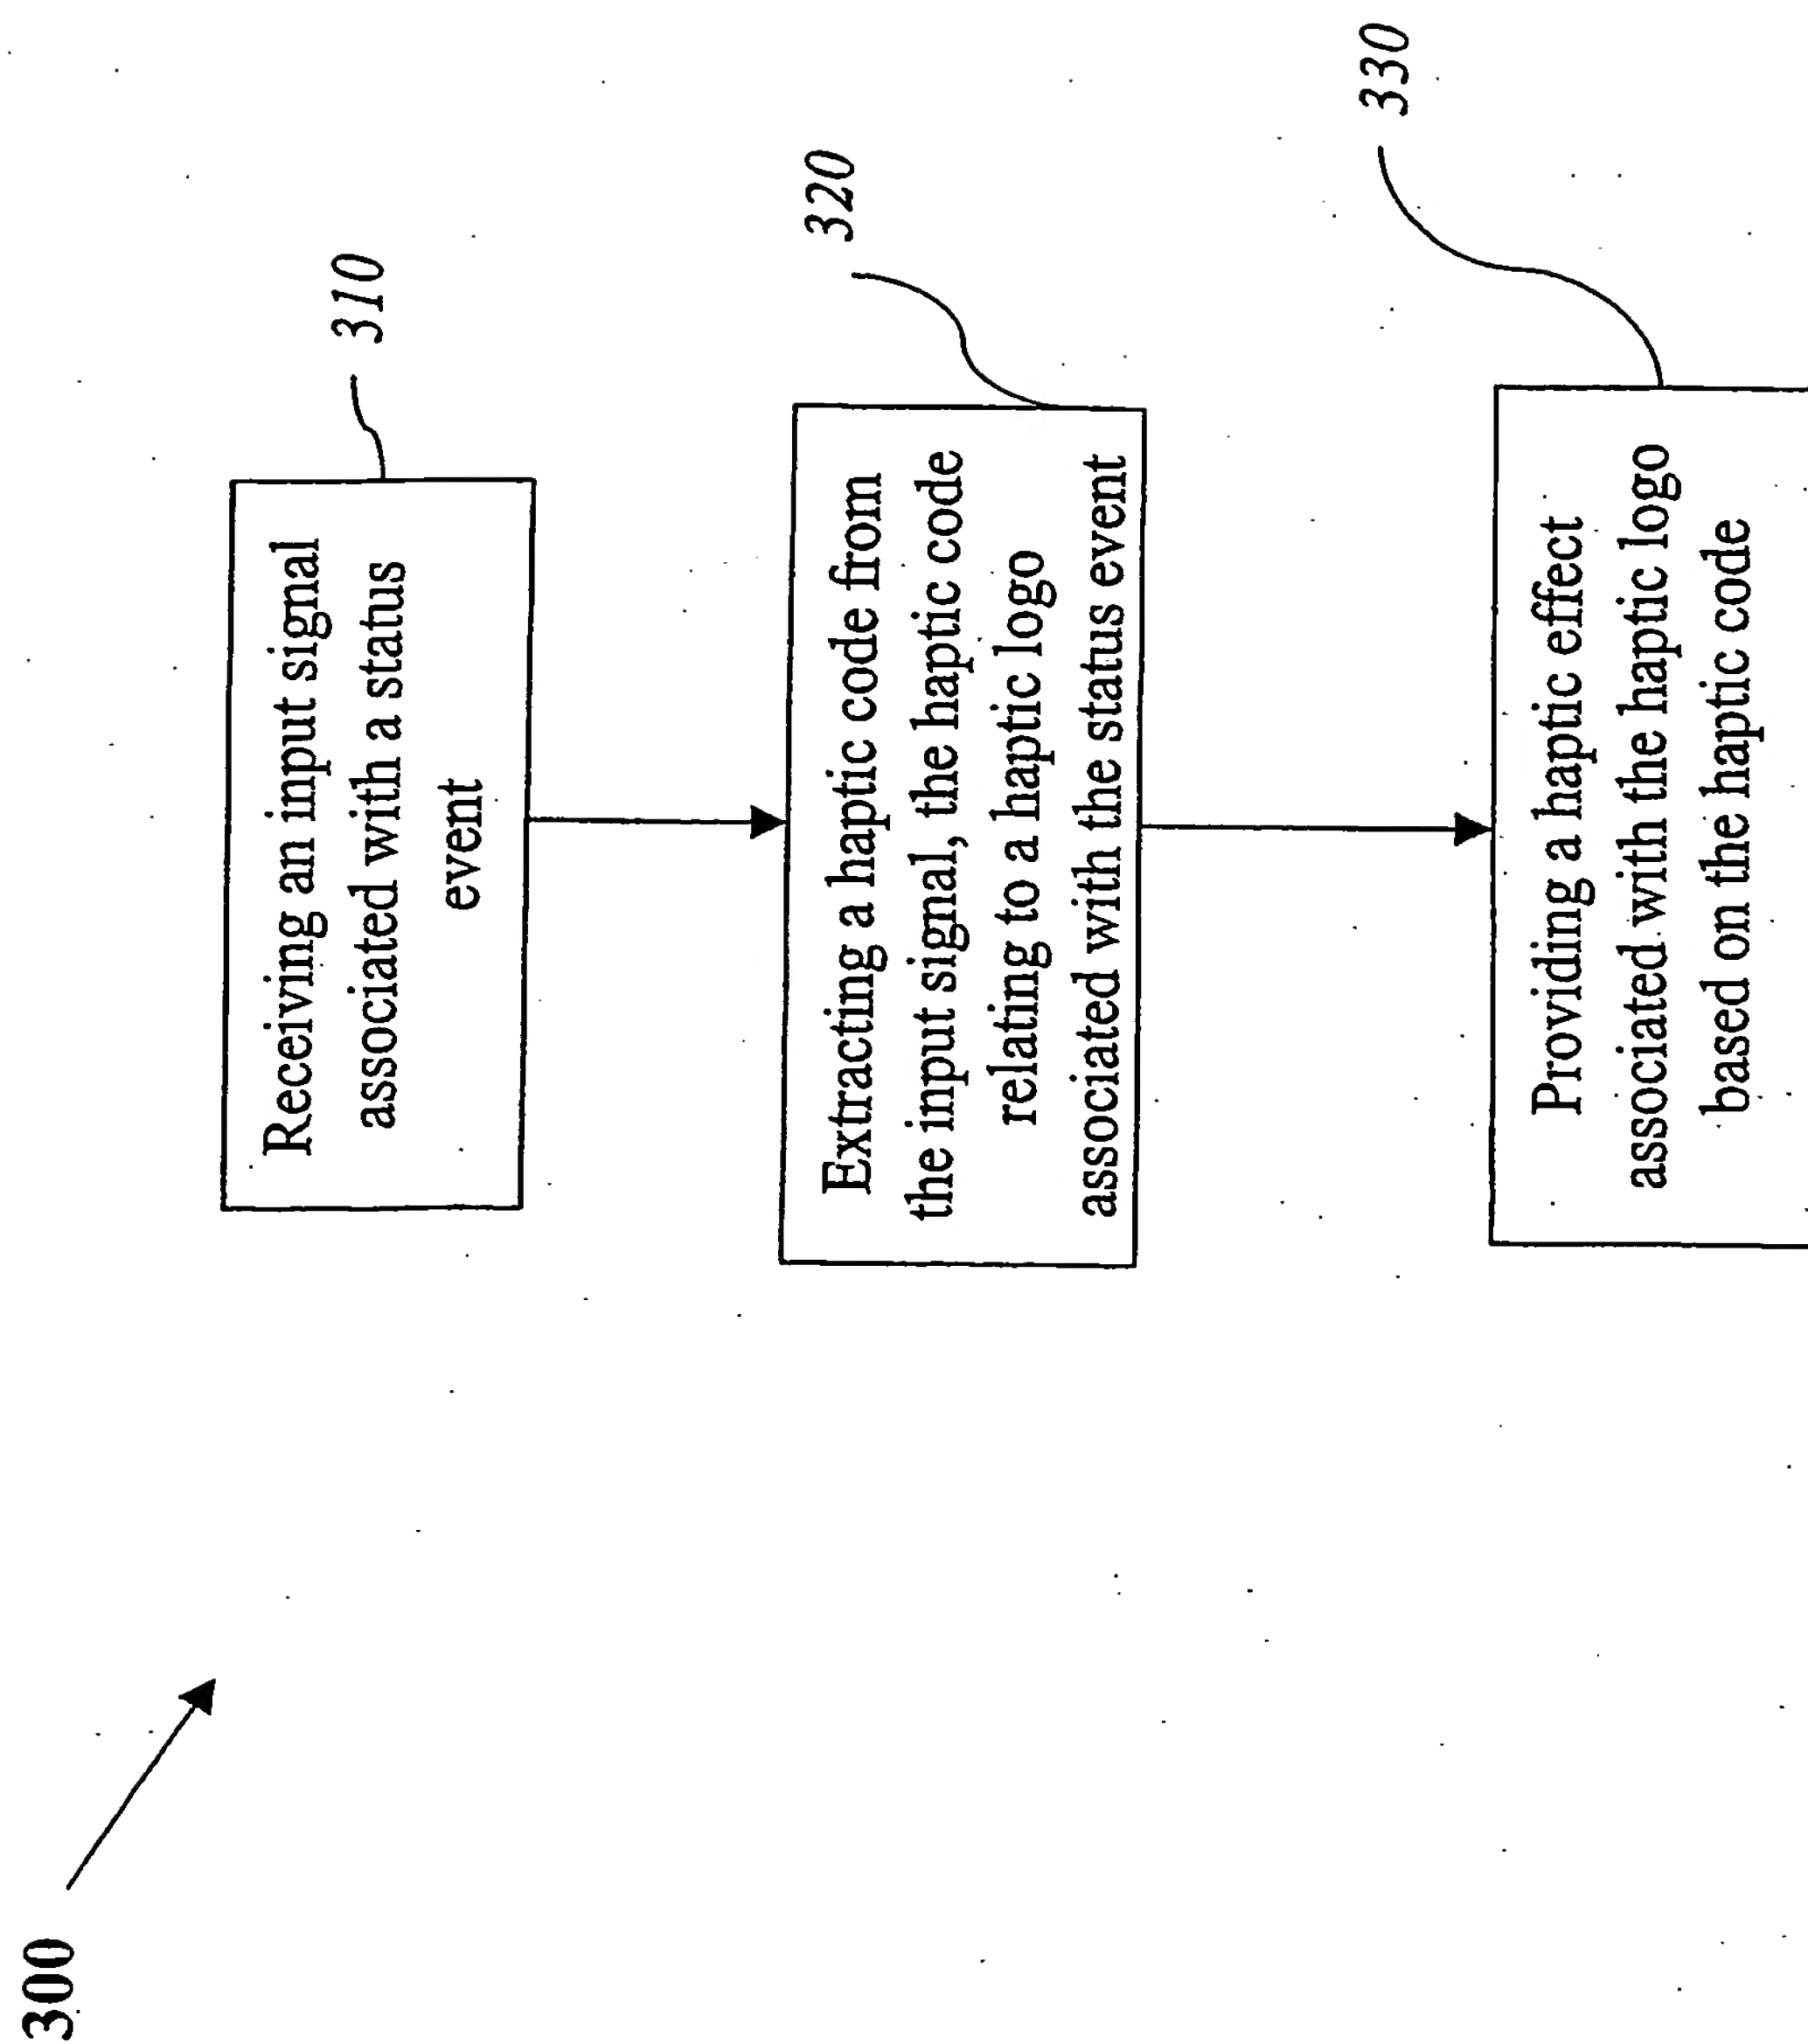


FIG. 3

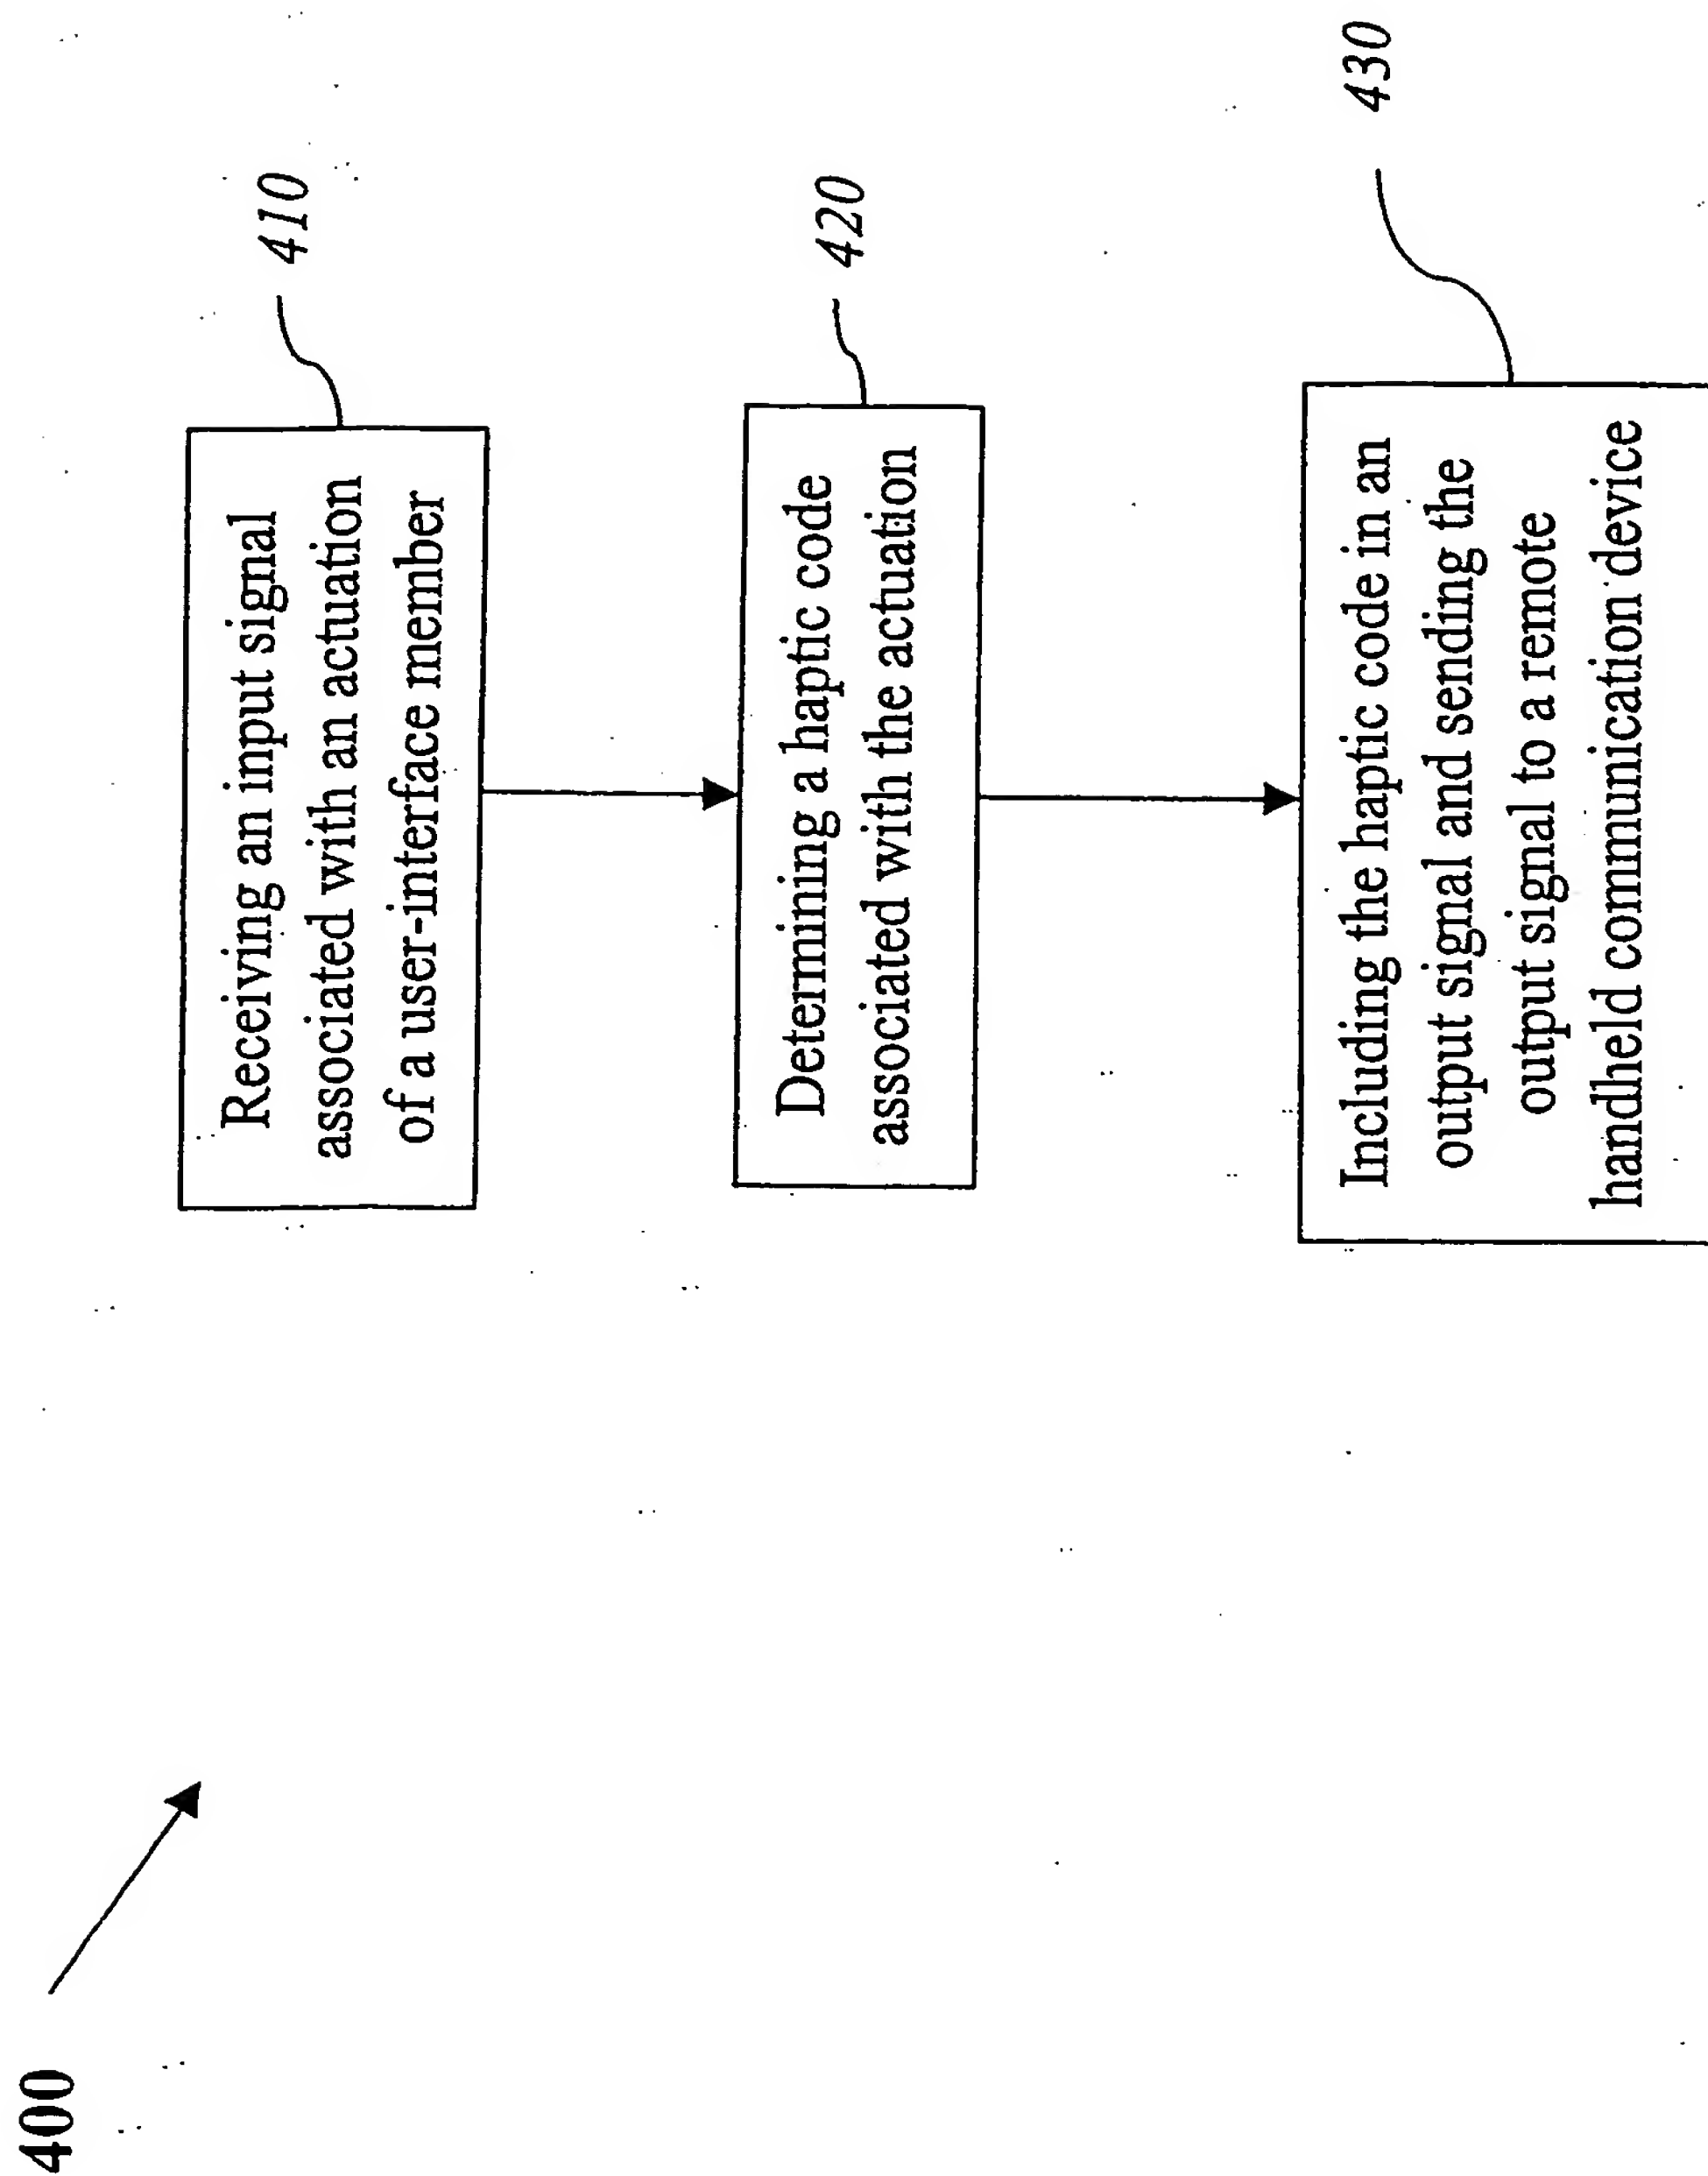


FIG. 4

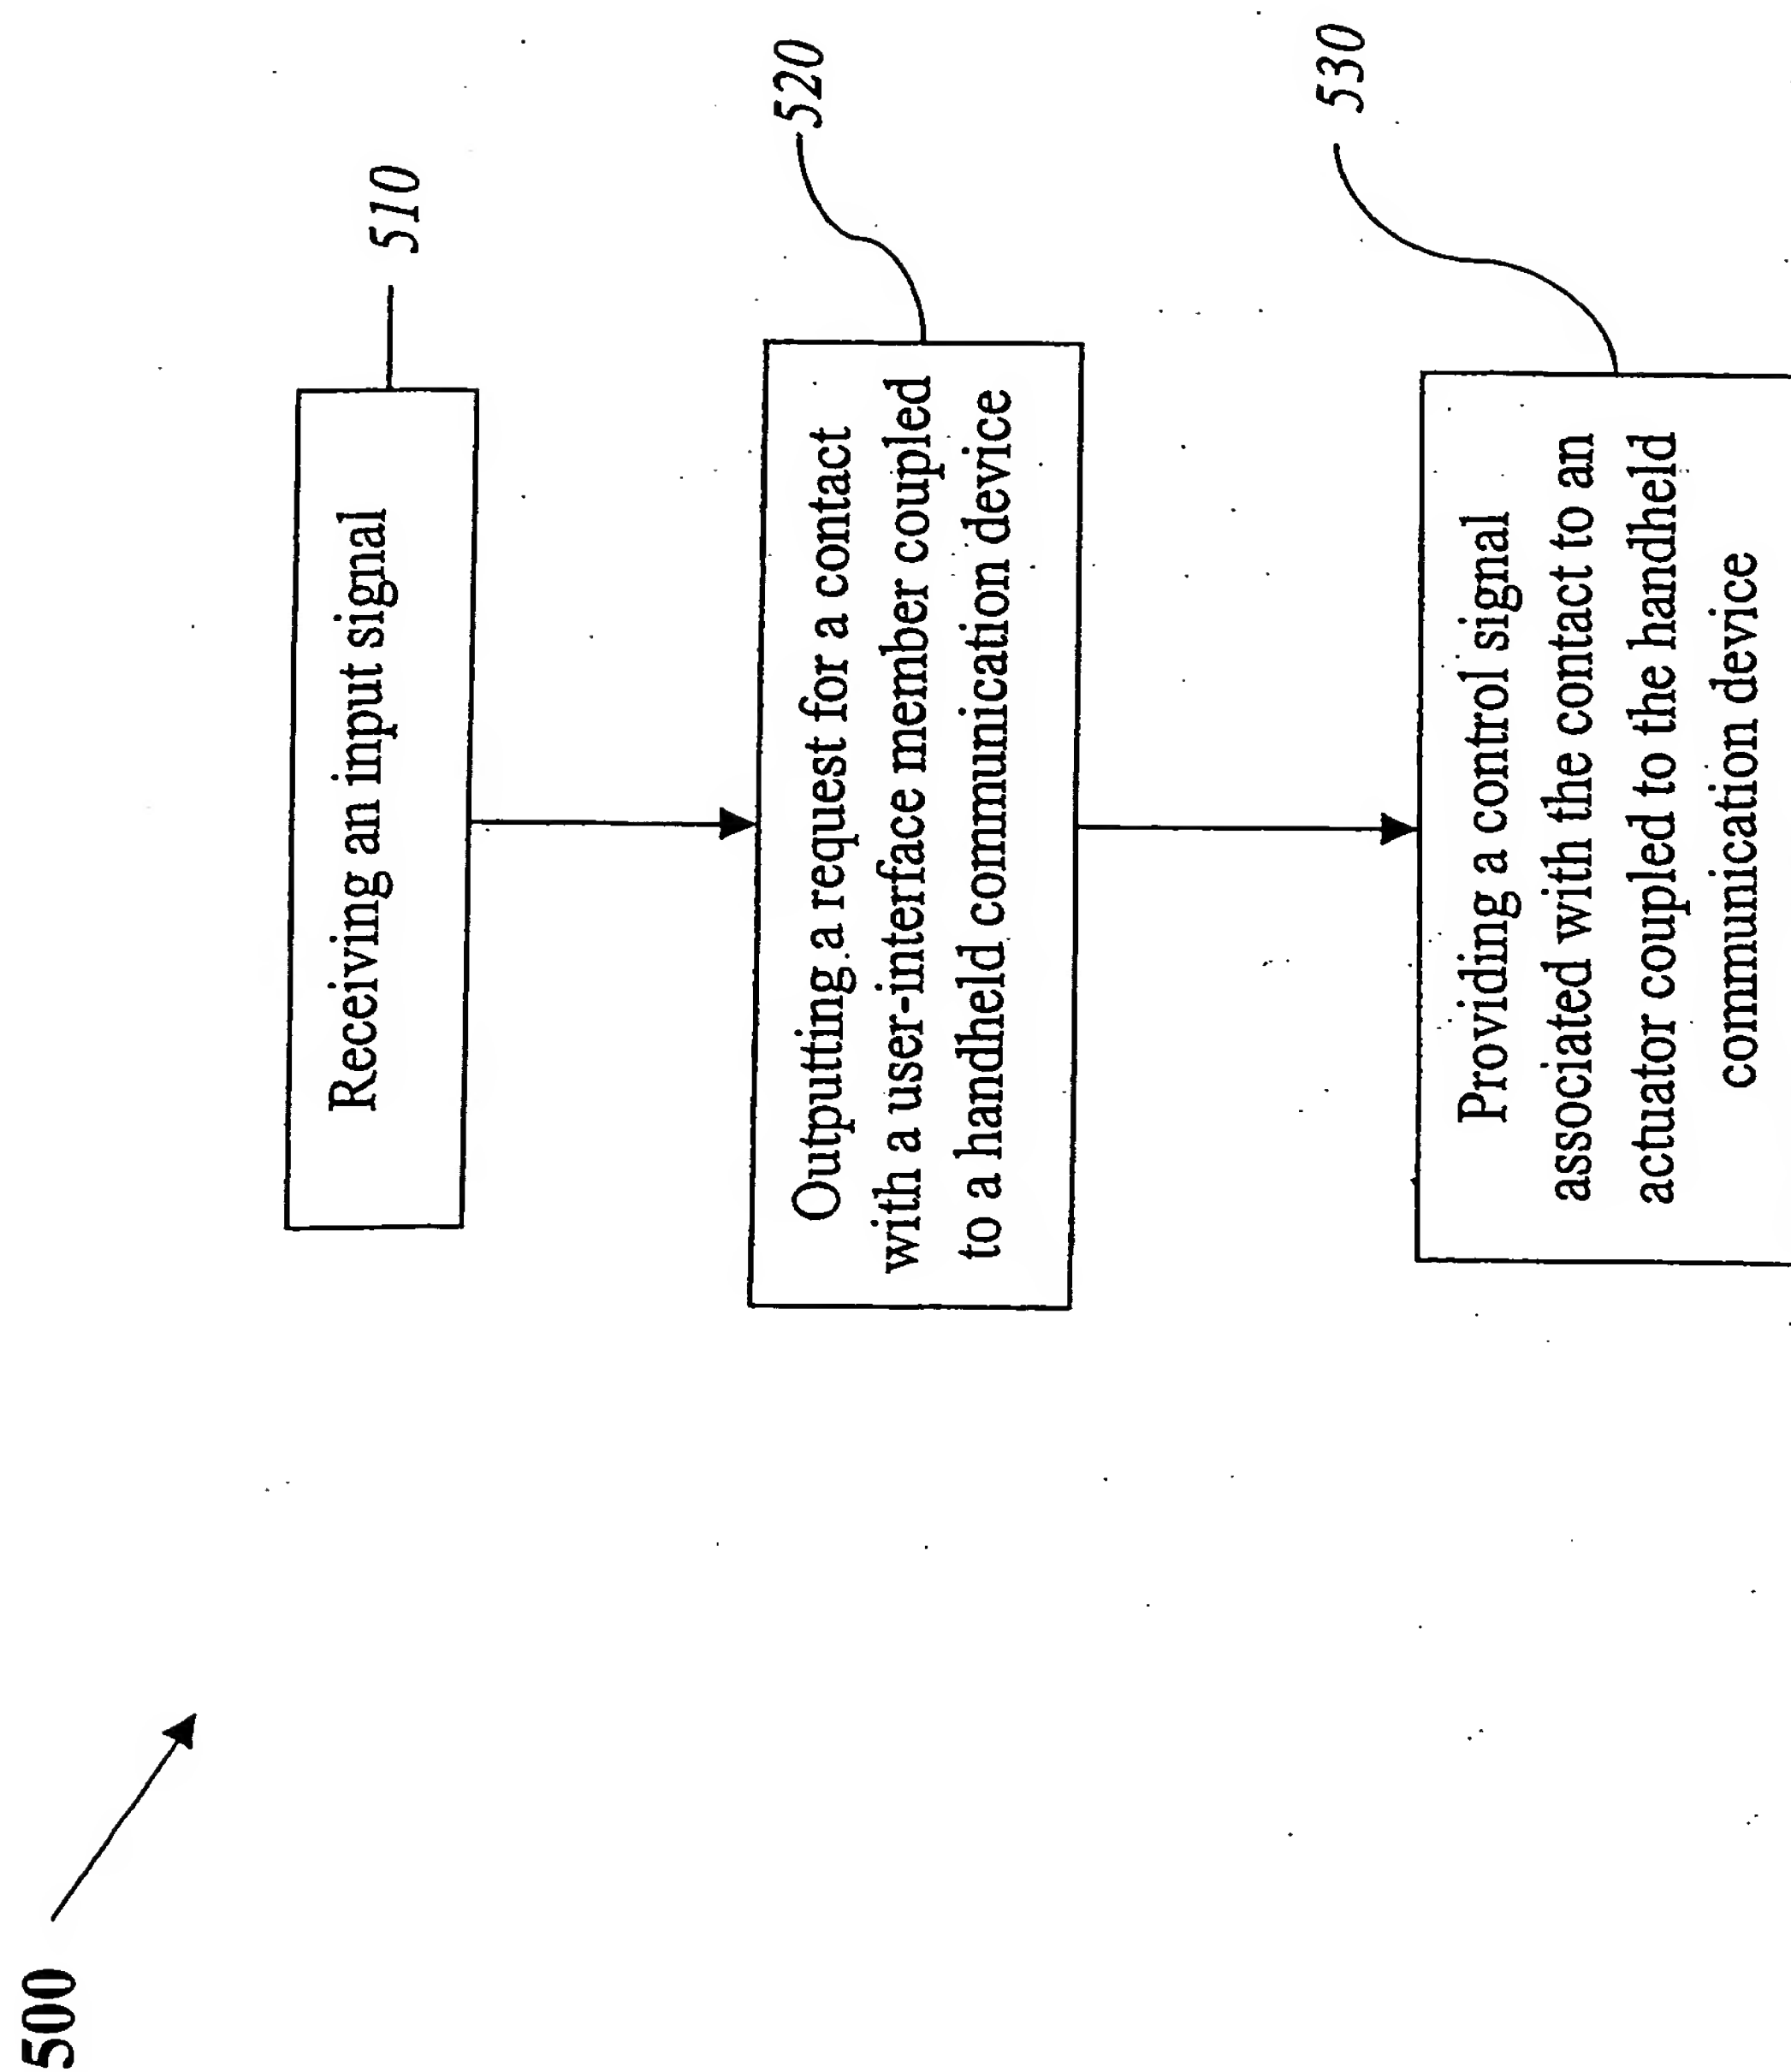


FIG. 5

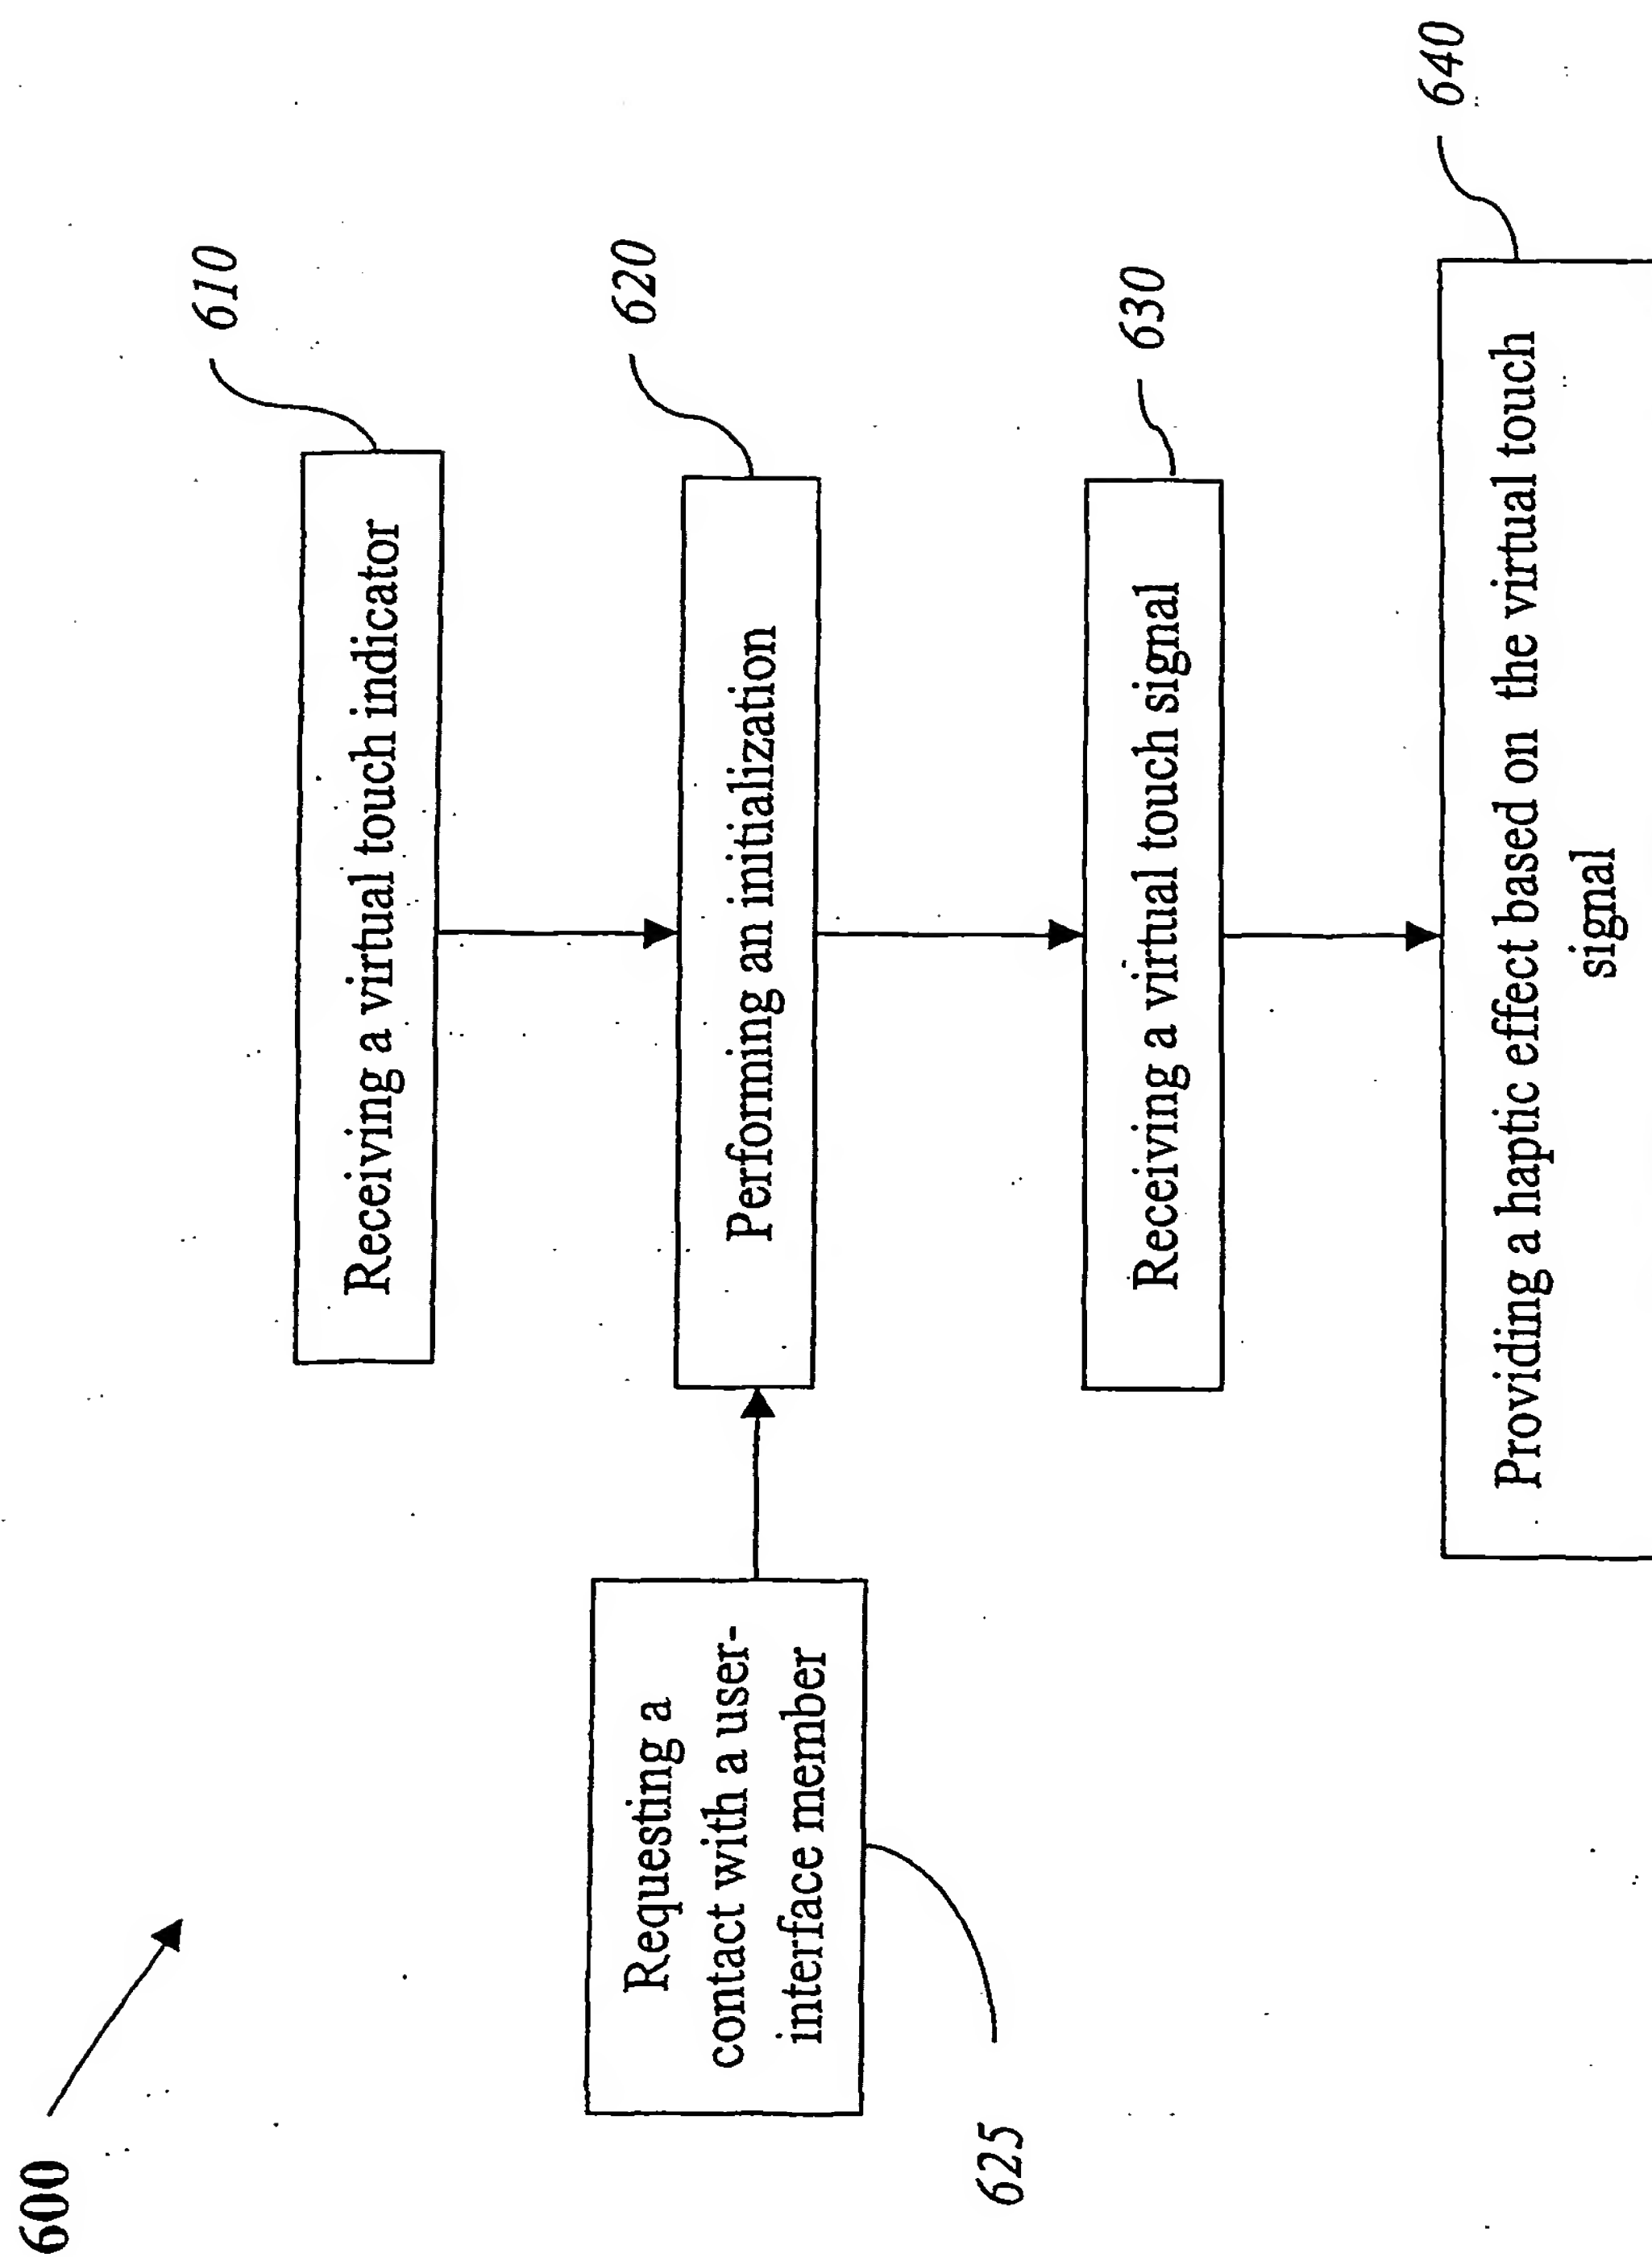


FIG. 6

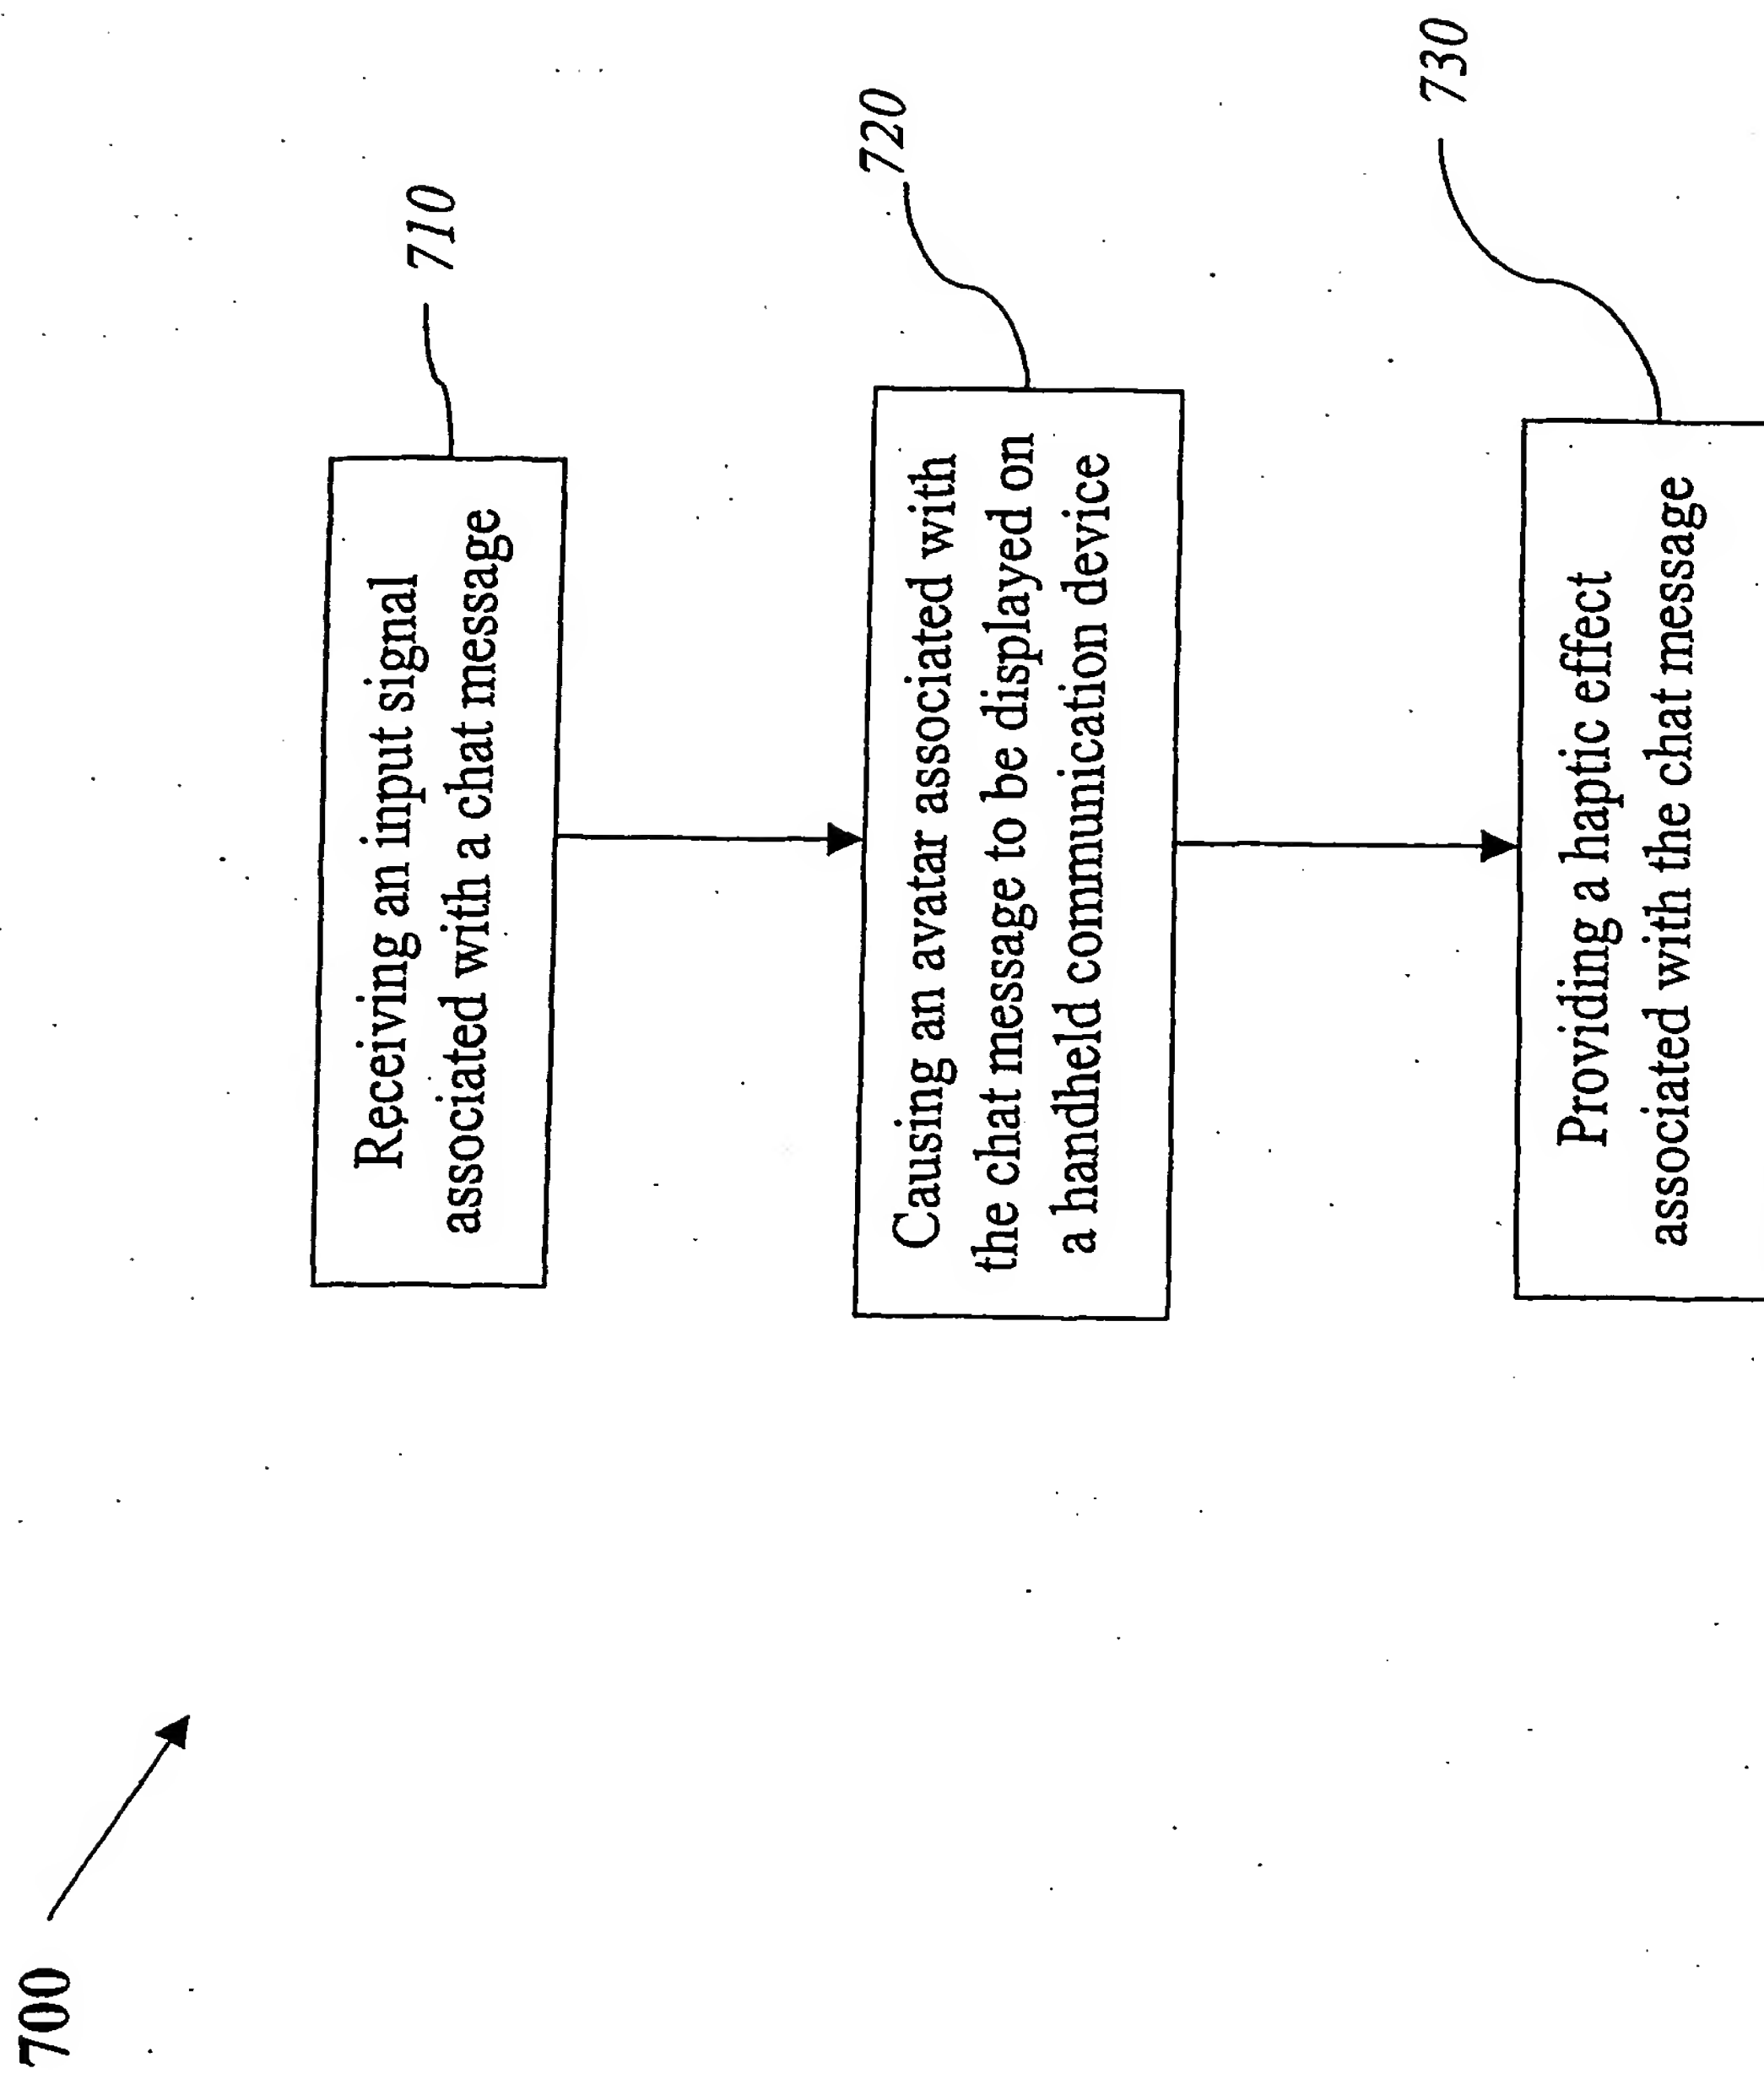


FIG. 7

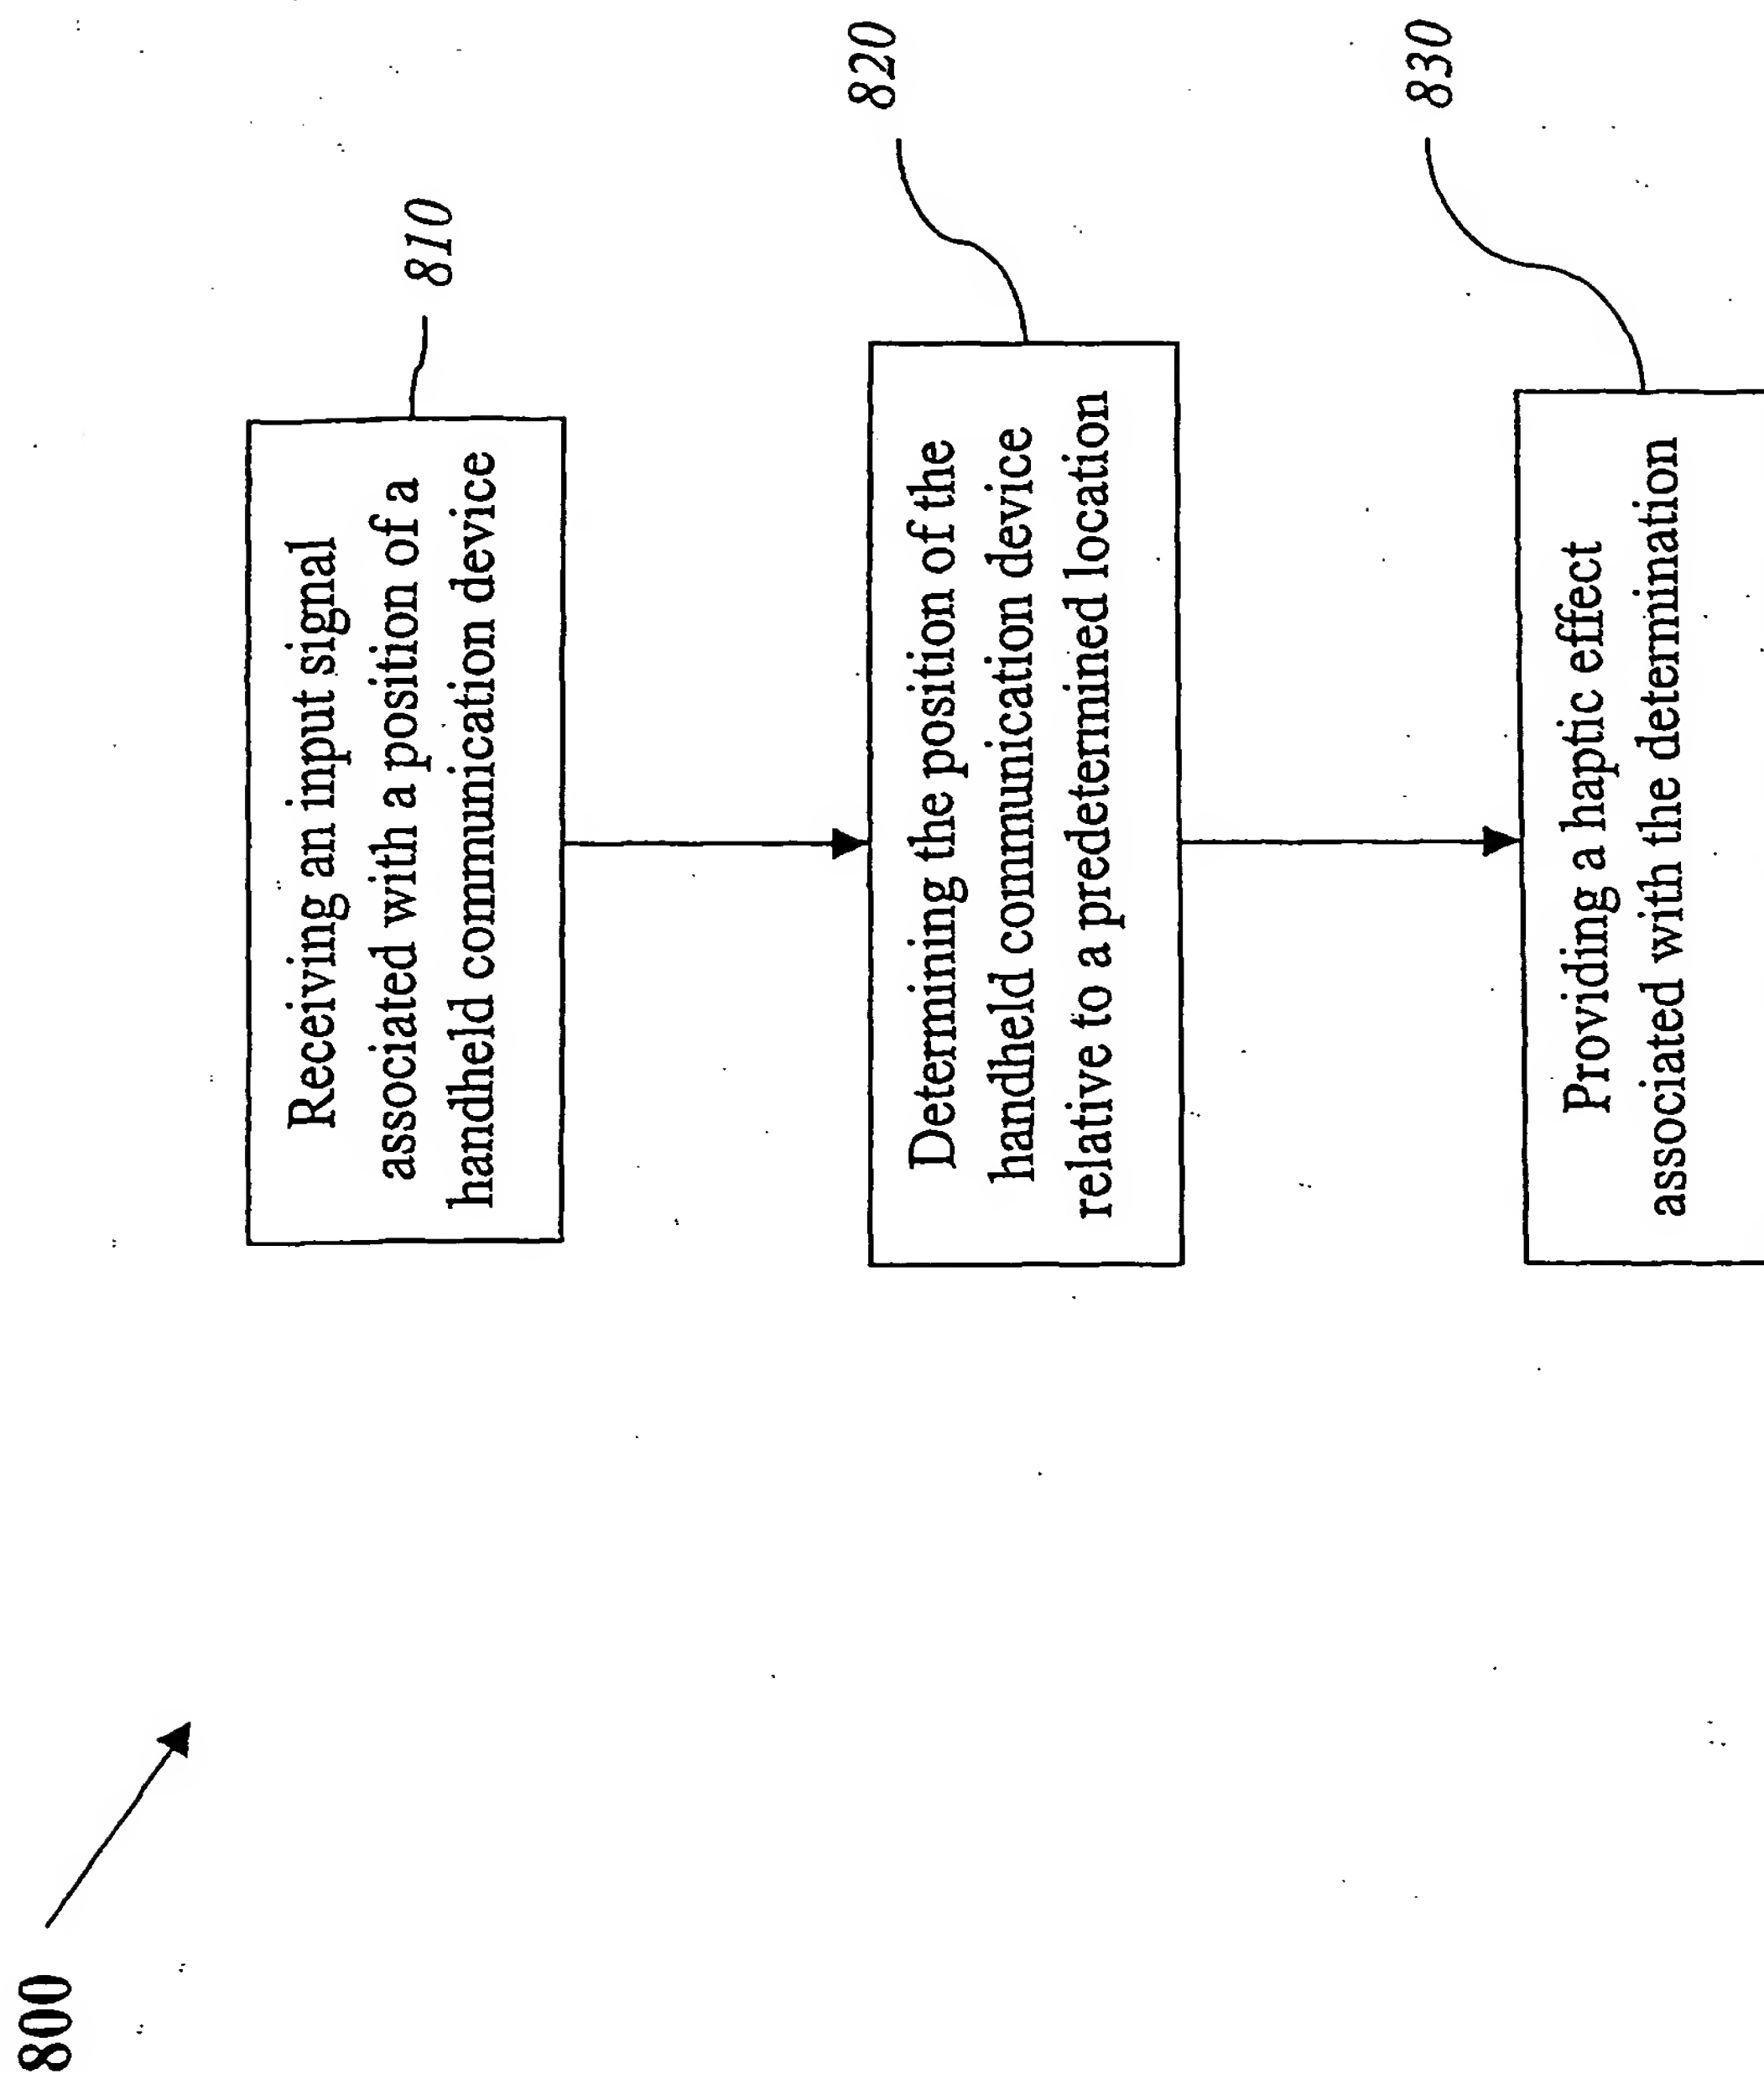


FIG. 8

900 →

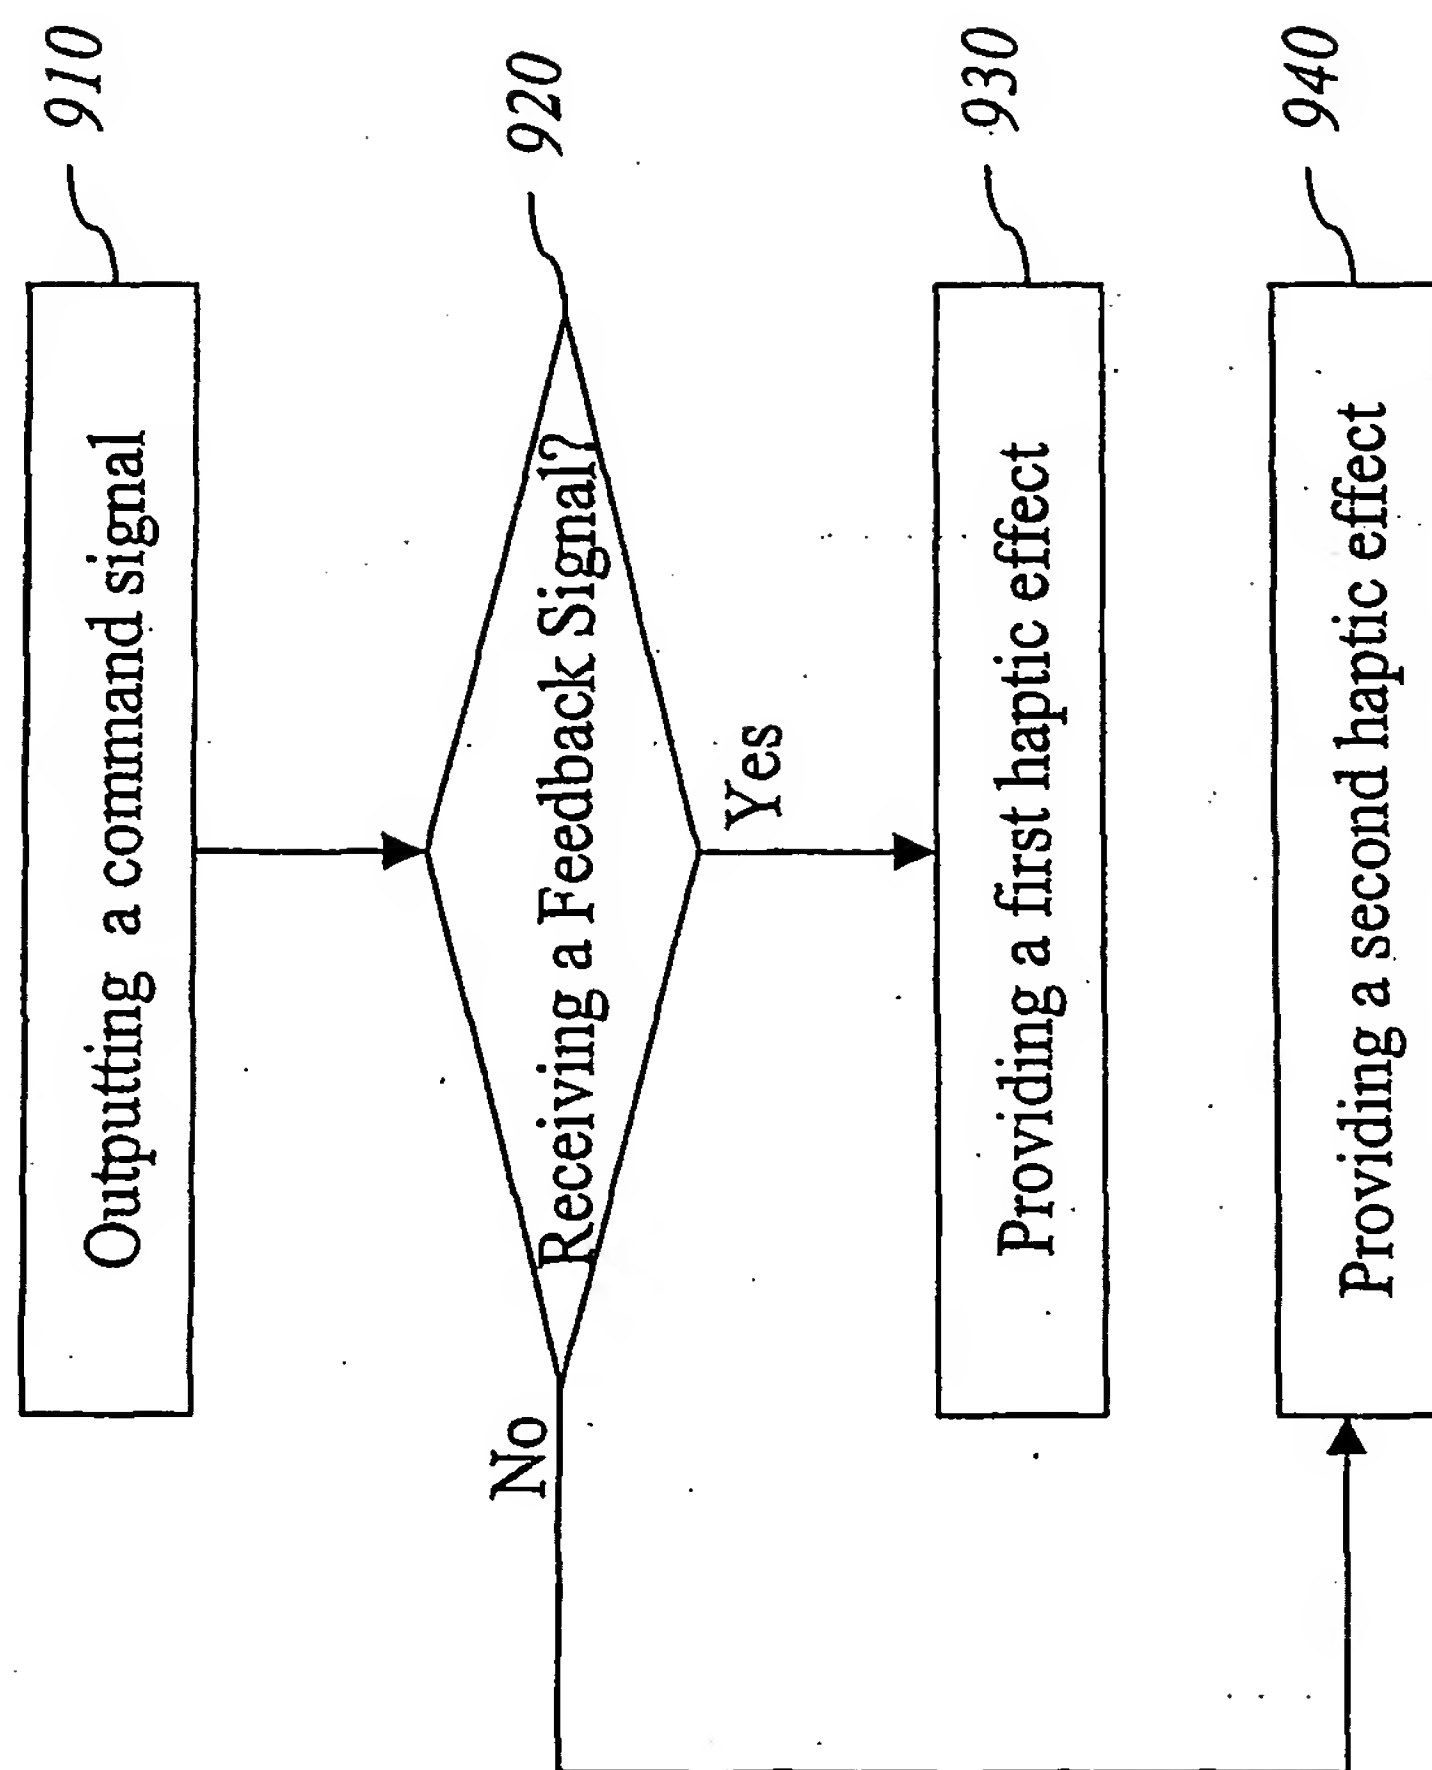


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/38899

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : A61B 5/00; G09G 5/00; G06F 15/16

US CL : 600/300; 345/156; 709/206, 207

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 600/300; 345/156; 709/206, 207

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	US 2002/0194246 A1 (MOSKOWITZ et al.) 19 December 2002, page 1, paragraph 6; page 2, paragraph 24; page 4, paragraph 39.	1-30
X, P	US 6,626,358 B1 (BREIMESSER et al) 30 September 2003, column 1, lines 26-67; column 2, lines 1-47	1-30

☐

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

*** Special categories of cited documents:****"A"** document defining the general state of the art which is not considered to be of particular relevance**"E"** earlier application or patent published on or after the international filing date**"L"** document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)**"O"** document referring to an oral disclosure, use, exhibition or other means**"P"** document published prior to the international filing date but later than the priority date claimed**"T"**

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

07 April 2004 (07.04.2004)

Date of mailing of the international search report

19 APR 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US

Commissioner for Patents

P.O. Box 1450

Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Jeffrey A. Gaffin

Telephone No. 703-305-3900

PATENT COOPERATION TREATY

PCT

NOTIFICATION CONCERNING
SUBMISSION OR TRANSMITTAL
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

From the INTERNATIONAL BUREAU


To:

ALEMANNI, John, C.
Kilpatrick Stockton LLP
1001 West Fourth St.
Winston-Salem, NC 27101
United States of America

Date of mailing (day/month/year) 15 March 2004 (15.03.2004)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference IMM152A.PCT	
International application No. PCT/US2003/038899	
International publication date (day/month/year) Not yet published	
International filing date (day/month/year) 08 December 2003 (08.12.2003)	Priority date (day/month/year) 08 December 2002 (08.12.2002)
Applicant IMMERSION CORPORATION et al	

- By means of this Form, which replaces any previously issued notification concerning submission or transmittal of priority documents, the applicant is hereby notified of the date of receipt by the International Bureau of the priority document(s) relating to all earlier application(s) whose priority is claimed. Unless otherwise indicated by the letters "NR", in the right-hand column or by an asterisk appearing next to a date of receipt, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).
- (If applicable) The letters "NR" appearing in the right-hand column denote a priority document which, on the date of mailing of this Form, had not yet been received by the International Bureau under Rule 17.1(a) or (b). Where, under Rule 17.1(a), the priority document must be submitted by the applicant to the receiving Office or the International Bureau, but the applicant fails to submit the priority document within the applicable time limit under that Rule, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.
- (If applicable) An asterisk(*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b) (the priority document was received after the time limit prescribed in Rule 17.1(a) or the request to prepare and transmit the priority document was submitted to the receiving Office after the applicable time limit under Rule 17.1(b)). Even though the priority document was not furnished in compliance with Rule 17.1(a) or (b), the International Bureau will nevertheless transmit a copy of the document to the designated Offices, for their consideration. In case such a copy is not accepted by the designated Office as priority document, Rule 17.1(c) provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

<u>Priority date</u>	<u>Priority application No.</u>	<u>Country or regional Office or PCT receiving Office</u>	<u>Date of receipt of priority document</u>
08 Dec 2002 (08.12.2002)	60/431,662	US	01 Marc 2004 (01.03.2004)

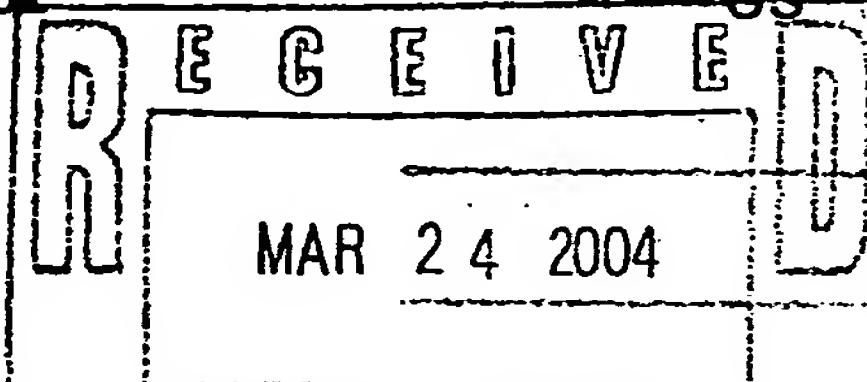

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 338-70-90	Authorized officer Michelle NDOME-MAKAKE Telephone No. (41-22) 338 8396
--	---

PCT REQUEST

IMM152A.PCT

Original (for SUBMISSION) - printed on 08.12.2003 12:34:58 PM

0	For receiving Office use only	
0-1	International Application No.	
0-2	International Filing Date	
0-3	Name of receiving Office and "PCT International Application"	
0-4	Form - PCT/RO/101 PCT Request	
0-4-1	Prepared using	PCT-EASY Version 2.92 (updated 01.07.2003)
0-5	Petition The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	United States Patent and Trademark Office (USPTO) (RO/US)
0-7	Applicant's or agent's file reference	IMM152A.PCT
I	Title of invention	METHODS AND SYSTEMS FOR PROVIDING HAPTIC MESSAGING TO HANDHELD COMMUNICATION DEVICES
II	Applicant	
II-1	This person is:	applicant only
II-2	Applicant for	all designated States except US
II-4	Name	IMMERSION CORPORATION
II-5	Address:	801 Fox Lane San Jose, CA 95131 United States of America
II-6	State of nationality	US
II-7	State of residence	US
III-1	Applicant and/or inventor	
III-1-1	This person is:	applicant and inventor
III-1-2	Applicant for	US only
III-1-4	Name (LAST, First)	GRANT, Danny
III-1-5	Address:	6678 Chateaubriand Montreal, Québec H2S 2N7 Canada
III-1-6	State of nationality	CA
III-1-7	State of residence	CA